



Features

• DELTAWING 1500 4K is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1440x160x60mm dimensions, 55W system power, 7,400lm flux and 135lm/W efficacy, CRi (Ra) >80, 4000K (Neutral White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable (4-steps DIP switch) driver (31W 4300lm, 39W 5400lm, 47W 6450lm, 55W 7400lm), RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


Product Overview

Product name	DELTAWING 1500 4K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	PC Polycarbonate, Steel
Mount	Ceiling surface mounting, Wall surface mounted
General application	Education, Logistics & Industry, Office
ETIM Class	EC002892
E-number FI	4279331
Fixture luminous flux (lm)	7400
Luminaire efficacy (lm/W)	135
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	55

DELTAWING 1500 4K
0042932

Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429328
Warranty	5 years
Dimming method	N/A

Photometry

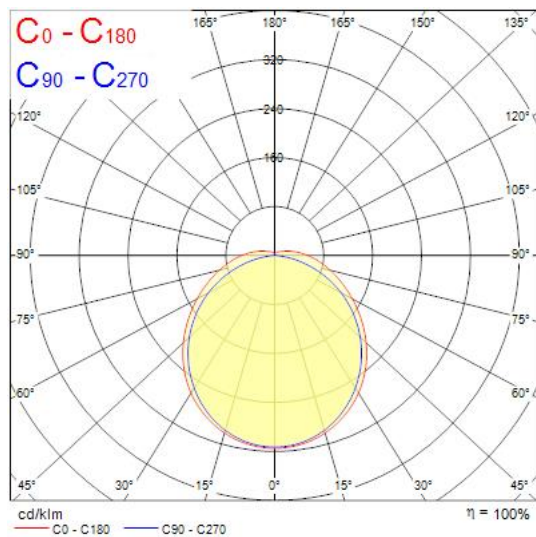

Technical drawings

