

Features

• Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + MPO diffuser, Direct Light Distribution, Luminaire Dimensions: 595x595x52mm, Sylvania White body colour, IP20, IK07, Emergency 3 hours, Low LED flicker (+/-5%), Neutral White (4000K), LED Colour Temperature, 3527lm, 32W, 110lm/W, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<15, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.



Product Overview

Product name	RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3527
Luminaire efficacy (lm/W)	110
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 15
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80

RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE 0052583

Total power consumption (W)	32
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288525839
Warranty	5 years
Dimming method	N/A

Photometry

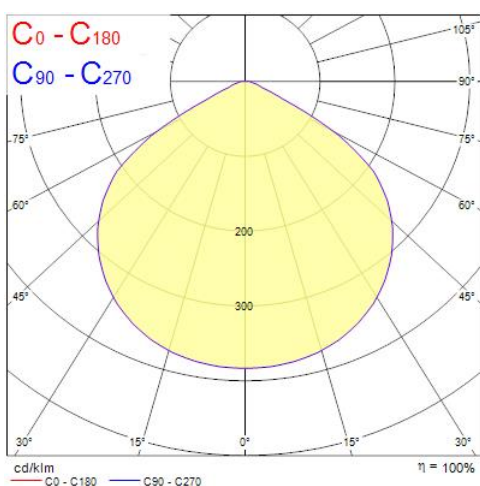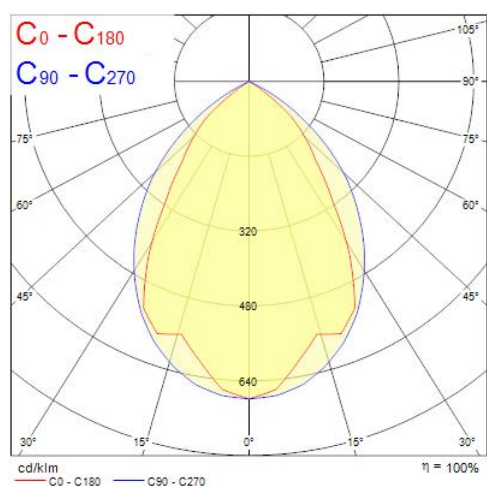


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.89 0.67	41.6°	33.7°	9574 2007	2789
1.0	1.78 1.33	41.6°	33.7°	2390 502	692
1.5	2.66 2.00	41.6°	33.7°	1054 223	308
2.0	3.55 2.67	41.6°	33.7°	598 125	173
2.5	4.44 3.33	41.6°	33.7°	383 80	111
3.0	5.33 4.00	41.6°	33.7°	288 56	77

RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE
0052583



Technical drawings

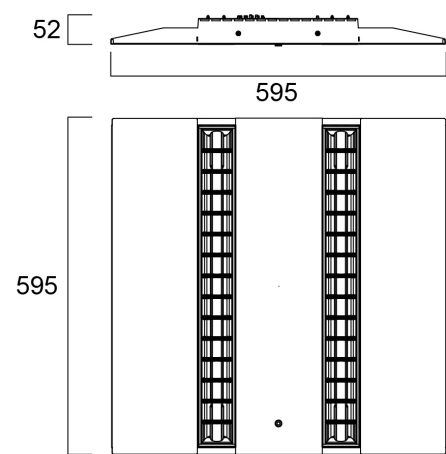

Data table

GENERAL DATA

Product name	RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A

RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE 0052583

Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3527
Luminaire efficacy (lm/W)	110
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 15
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	32
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	5.5

RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE 0052583

Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	41
Max. products per 13A C Breaker	53
Max. products per 16A C Breaker	65
Max. products per 20A C Breaker	82
Max. products per 10A B Breaker	41
Max. products per 13A B Breaker	53
Max. products per 16A B Breaker	65
Max. products per 20A B Breaker	82

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	96000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	52
Weight (kg)	4.5

PACKAGING

Product EAN number	5410288525839
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0



RANA NEO 3500LM REC 600x600 840 CC EM 2L WHITE
0052583

DUN14 (inner)	05410288525839
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

SAFETY DATA

Glow Wire Test (°C)	850
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No