

START Downlight 175 IP54 1550lm 830
0030326



Features

• Ceiling recessed LED downlight IP54 (from the front), perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 15W, 3000K, Driver Current: 390mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP54 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 175 IP54 1550lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278147
Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	107
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 25

START Downlight 175 IP54 1550lm 830
0030326


Photobiological Risk Group	RG0
Total power consumption (W)	14.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303260
Warranty	5 years
Dimming method	N/A

Photometry

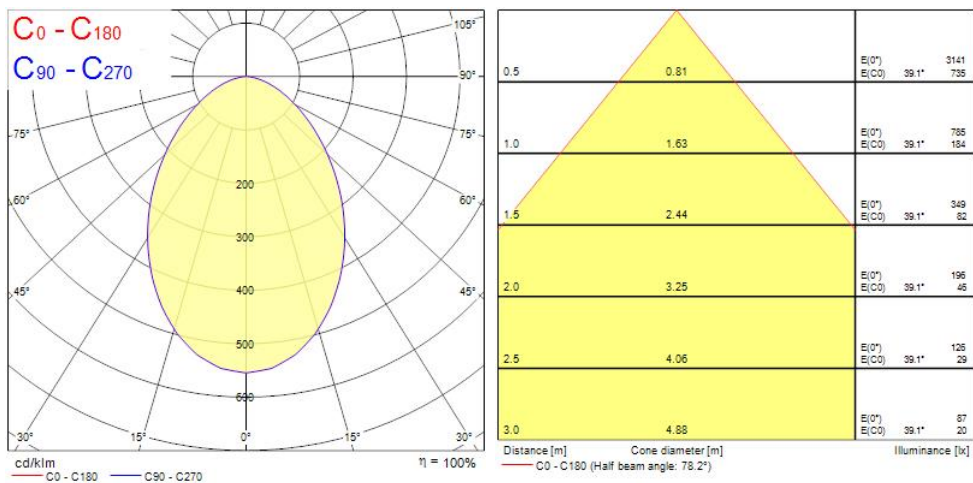

START Downlight 175 IP54 1550lm 830
0030326

Technical drawings

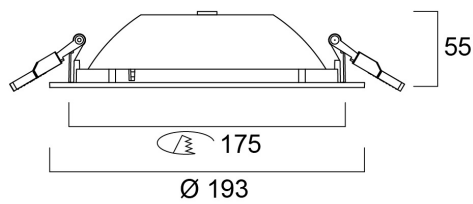

Data table

GENERAL DATA

Product name	START Downlight 175 IP54 1550lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4278147
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	107

START Downlight 175 IP54 1550lm 830 0030326

LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	14.5
Current (A)	0.065
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	400
Inrush Current (A)	7.52
Inrush Duration (µs)	830
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	50
Max. products per 13A C Breaker	61

START Downlight 175 IP54 1550lm 830 0030326

Max. products per 16A C Breaker	74
Max. products per 20A C Breaker	86
Max. products per 10A B Breaker	40
Max. products per 13A B Breaker	49
Max. products per 16A B Breaker	59
Max. products per 20A B Breaker	69
Connectable conductor cross section - Min (mm ²)	0.5
Connectable conductor cross section - Max (mm ²)	1.5

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

PHYSICAL DATA

Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	193
Weight (kg)	0.371
Recessed Depth (mm)	150

PACKAGING

Product EAN number	5410288303260
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	6.8
DUN14 (inner)	15410288303267



START Downlight 175 IP54 1550lm 830
0030326

Units per outer package	16
Packaging outer length / height (cm)	56.8
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	22.5

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No