



Features


- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent GLS lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- A+ energy rating

Product Overview

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Product name                      | ToLEDo GLS V6 1521LM 840 E27 SL     |
| Technology                        | LED                                 |
| Watt (Rated) (W)                  | 14                                  |
| Cap/Base                          | E27                                 |
| Fixture rating                    | Open                                |
| General application               | Hospitality, Residential & Consumer |
| ETIM Class                        | EC001959                            |
| E-number FI                       | 4740567                             |
| Correlated colour temperature (k) | 4000                                |
| Light colour                      | Cool White                          |
| CRI (Ra)                          | 80                                  |
| Beam Angle (°)                    | 180                                 |
| Wattage (W)                       | 14                                  |
| Power consumption (W)             | 14                                  |
| Average life (Nominal) (h)        | 15000                               |
| Product EAN number                | 5410288279664                       |
| Warranty                          | 3 years                             |
| Useful luminous flux (#use)       | 1521                                |

ToLEDo GLS V6 1521LM 840 E27 SL  
0027966

Technical drawings

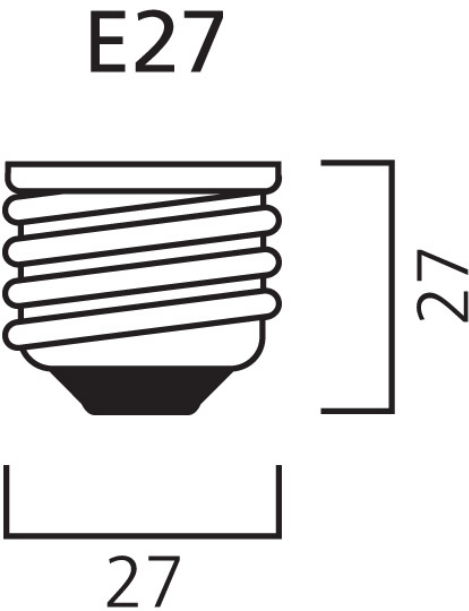

Data table

GENERAL DATA

|                                         |                                     |
|-----------------------------------------|-------------------------------------|
| Product name                            | ToLEDo GLS V6 1521LM 840 E27 SL     |
| Technology                              | LED                                 |
| Watt (Rated) (W)                        | 14                                  |
| Cap/Base                                | E27                                 |
| Fixture rating                          | Open                                |
| General application                     | Hospitality, Residential & Consumer |
| Performance ambient temperature Tq (°C) | 25                                  |
| ETIM Class                              | EC001959                            |
| E-number FI                             | 4740567                             |
| Warranty                                | 3 years                             |

OPTICAL DATA



ToLEDo GLS V6 1521LM 840 E27 SL  
0027966

|                                              |            |
|----------------------------------------------|------------|
| Useful luminous flux (#use)                  | 1521       |
| Luminous flux (Rated) (lm)                   | 1521       |
| Correlated colour temperature (k)            | 4000       |
| Light colour                                 | Cool White |
| CRI (Ra)                                     | 80         |
| Beam Angle (°)                               | 180        |
| Lumen maintenance at end of nominal life (%) | 70         |

ELECTRICAL DATA

|                                                   |         |
|---------------------------------------------------|---------|
| Power consumption (W)                             | 14      |
| Wattage (W)                                       | 14      |
| Starting time (max) (s)                           | 0.5     |
| Warm-up time to 60% of full light (max) (s)       | 1       |
| Primary Supply/Product voltage - min (V)          | 220     |
| Primary Supply/Product voltage - max (V)          | 240     |
| Lamp power factor                                 | 0.5     |
| Control gear required                             | No      |
| No. Of switching cycles before premature failures | >50000  |
| Inrush Current (A)                                | 5.25    |
| Nominal Frequency (Hz)                            | 50/60Hz |
| Max. products per 10A C Breaker                   | 78      |
| Max. products per 16A C Breaker                   | 126     |
| Max. products per 20A C Breaker                   | 158     |

LIFETIME DATA

|                            |       |
|----------------------------|-------|
| Average life (Nominal) (h) | 15000 |
| Average life (Rated) (h)   | 15000 |

PHYSICAL DATA

|                               |     |
|-------------------------------|-----|
| Nominal Product Length (mm)   | 120 |
| Nominal Product Diameter (mm) | 60  |



ToLEDo GLS V6 1521LM 840 E27 SL  
0027966

|             |       |
|-------------|-------|
| Weight (kg) | 0.056 |
|-------------|-------|

PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288279664  |
| Packaging single length / height (cm) | 11.3           |
| Packaging single width (cm)           | 6.4            |
| Packaging single depth (cm)           | 6.4            |
| DUN14 (inner)                         | 15410288279661 |
| Units per inner package               | 6              |
| Packaging inner length / height (cm)  | 20.4           |
| Packaging inner width (cm)            | 13.4           |
| Packaging inner depth (cm)            | 13.7           |
| DUN14 (outer)                         | 25410288279668 |
| Units per outer package               | 60             |
| Packaging outer length / height (cm)  | 72.4           |
| Packaging outer width (cm)            | 22.2           |
| Packaging outer depth (cm)            | 29.7           |

SAFETY DATA

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| Breakage cleaning instructions      | Not applicable                             |
| Special purpose lamp                | No                                         |
| Dry applications use only           | Yes                                        |
| Suitable for household illumination | Yes                                        |
| Safety message                      | Not Suitable for totally enclosed fixtures |