


INSET TREND 75 SW BN NO-LMP
0083510



Features

- INSET TREND 75 SW BN NO-LMP is the recessed housing frame to use with RefLED GU10 spotlight lamp Ø50mm - GU10 spotlight not included. Aluminium body, round bezel ring in brushed nickel finish, IP23 degree of protection, class II, Suitable for internal environment only.


Product Overview

| | |
|---------------------------------|-------------------------------------|
| Product name | INSET TREND 75 SW BN NO-LMP |
| Technology | Accessory |
| Cap/Base | GU10 |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Light source included | Fixture without Lightsource |
| Environment | Indoor |
| General application | Hospitality, Residential & Consumer |
| ETIM Class | EC001744 |
| E-number FI | 4279647 |
| Fixture luminous flux (lm) | 1 |
| LOR (%) | Dependent on lamp |
| Light colour | N/A |
| Colour Variation Initial (SDCM) | N/A |
| Photobiological Risk Group | Not applicable |
| Total power consumption (W) | 0.1 |
| Electrical protection | Class II |
| Control gear type | Not required |

INSET TREND 75 SW BN NO-LMP 0083510

| | |
|--------------------|---------------|
| Dimmable | No |
| Housing colour | Aluminium |
| IP rating | IP23/20 |
| IK rating | IK02 |
| Product EAN number | 5410288835105 |
| Warranty | 3 years |
| Dimming method | N/A |

Technical drawings

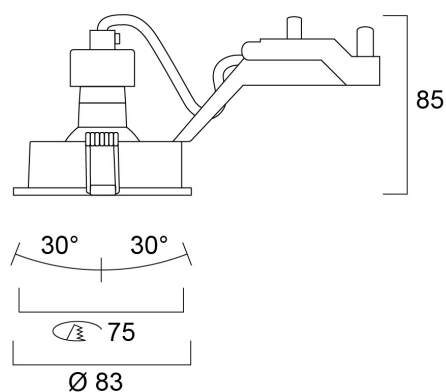

Data table

GENERAL DATA

| | |
|----------------------------------|-------------------------------------|
| Product name | INSET TREND 75 SW BN NO-LMP |
| Technology | Accessory |
| Cap/Base | GU10 |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Environment | Indoor |
| General application | Hospitality, Residential & Consumer |
| Operating temperature range (°C) | -10°C...+40°C |
| ETIM Class | EC001744 |

INSET TREND 75 SW BN NO-LMP 0083510

| | |
|-------------|---------|
| E-number FI | 4279647 |
| Warranty | 3 years |

OPTICAL DATA

| | |
|---------------------------------|-------------------|
| Fixture luminous flux (lm) | 1 |
| LOR (%) | Dependent on lamp |
| Light colour | N/A |
| Colour Variation Initial (SDCM) | N/A |
| Adjustable chromaticity | N |
| Distribution type | Symmetric |
| Photobiological Risk Group | Not applicable |

ELECTRICAL DATA

| | |
|---|-----------------------------|
| Light source included | Fixture without Lightsource |
| Total power consumption (W) | 0.1 |
| Current (A) | 0.001 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x % | 1 |
| Electrical protection | Class II |
| Control gear required | No |
| Control gear type | Not required |
| Dimmable | No |
| Dimming method | N/A |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. products per 10A C Breaker | 20 |
| Max. products per 16A C Breaker | 30 |
| Connectable conductor cross section - Max (mm ²) | 1.5 |

PHYSICAL DATA

| | |
|----------------|-----------|
| Housing colour | Aluminium |
| IP rating | IP23/20 |

INSET TREND 75 SW BN NO-LMP 0083510

| | |
|-------------------------------|----------------|
| IK rating | IK02 |
| Diffuser finish | Other |
| Diffuser material | None |
| Reflector finish | Not Applicable |
| Nominal Product Height (mm) | 85 |
| Nominal Product Diameter (mm) | 83 |
| Built-in diameter (mm) | 75 |
| Weight (kg) | 0.1 |
| Recessed Depth (mm) | 100 |

PACKAGING

| | |
|---------------------------------------|----------------|
| Product EAN number | 5410288835105 |
| Packaging single length / height (cm) | 13.3 |
| Packaging single width (cm) | 10.1 |
| Packaging single depth (cm) | 7.0 |
| DUN14 (inner) | 15410288835102 |
| Units per outer package | 30 |
| Packaging outer length / height (cm) | 53.0 |
| Packaging outer width (cm) | 28.0 |
| Packaging outer depth (cm) | 23.0 |

SAFETY DATA

| | |
|-------------------------------------|--------|
| Optimal operating condition (°C) | -10-40 |
| Special purpose lamp | No |
| Dry applications use only | No |
| Suitable for household illumination | No |