


RESISTO 1500 IP66 MWCORINF 4200LM 840
0010324

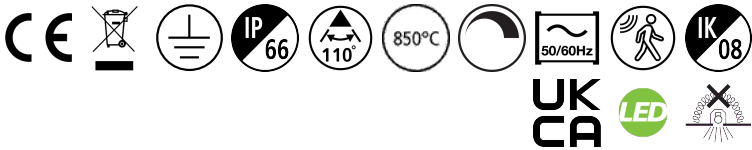

Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4200lm; 30W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; microwave motion sensor corridor function with infinite stand-by time and 10% stand-by level.


Product Overview

Product name	RESISTO 1500 IP66 MWCORINF 4200LM 840
Technology	LED
Cap/Base	Q10L
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Glare control	< 23
Photobiological Risk Group	RG1
Total power consumption (W)	30

RESISTO 1500 IP66 MWCORINF 4200LM 840 0010324

Electrical protection	Class I
Control gear type	LED driver constant current
Minimum dimming level (%)	10
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288103242
Warranty	5 years
Dimming method	Other
Useful luminous flux (#use)	4200

Photometry

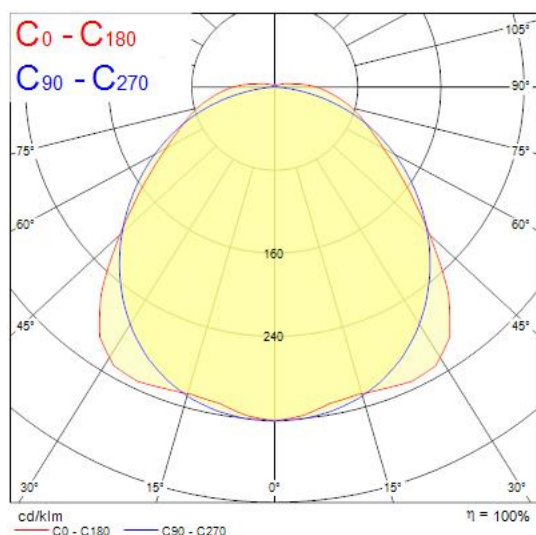

Technical drawings

