


Concord

OFFICELYTE 600 4000K C90 HE EM 2069529

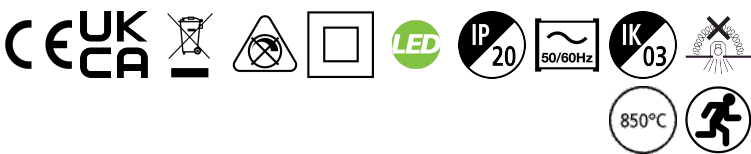

Features

• Concord OFFICELYTE 600 4000K C90 HE EM is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. 595x595x92mm dimensions. 3150lm luminous flux, 26.5W total power consumption, 119lm/W efficacy level, CRi90 4000K (Neutral white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class I electrical protection. Photobiological Risk Group 1. Lifespan 93k hours at L80B50. Glow Wire test 850°C. Integrated emergency with 3-hours LiFePO4 battery. Non-dimmable driver.



Product Overview

Product name	OFFICELYTE 600 4000K C90 HE EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Office, Education
ETIM Class	EC002892
Fixture luminous flux (lm)	3, 150
Luminaire efficacy (lm/W)	119
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90

OFFICELYTE 600 4000K C90 HE EM 2069529

Colour Variation Initial (SDCM)	3
Beam Angle (°)	87
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	345
Total power consumption (W)	26.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Product EAN number	5025768695294
Warranty	5 years
Dimming method	N/A

Photometry

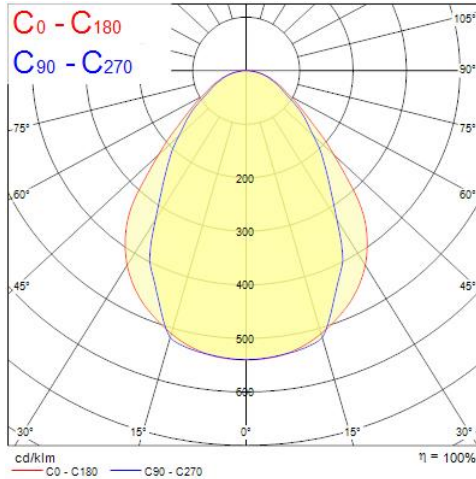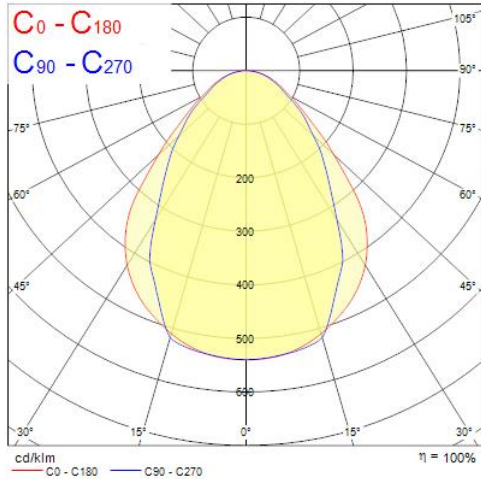


0.5	0.72 0.95	E(0°) E(C90) E(C0)	6800 1832 1304
1.0	1.43 1.90	E(0°) E(C90) E(C0)	1700 458 326
1.5	2.15 2.85	E(0°) E(C90) E(C0)	756 204 145
2.0	2.86 3.80	E(0°) E(C90) E(C0)	425 114 81
2.5	3.58 4.74	E(0°) E(C90) E(C0)	272 73 52
3.0	4.30 5.69	E(0°) E(C90) E(C0)	189 51 36


Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 87.0°)
— C90 - C270 (Half beam angle: 71.2°)

Concord
OFFICELYTE 600 4000K C90 HE EM
2069529

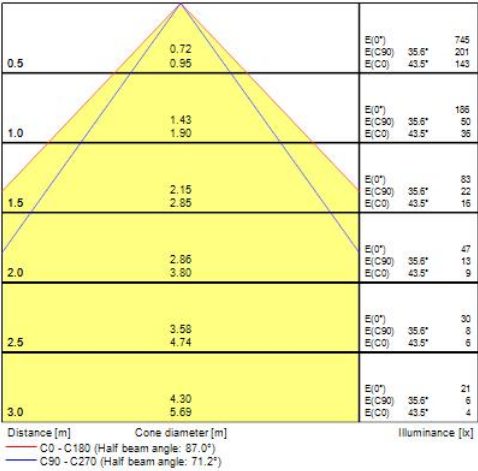

Technical drawings

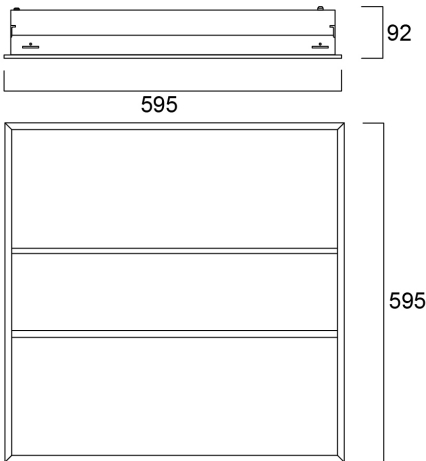

Data table

GENERAL DATA

Product name	OFFICELYTE 600 4000K C90 HE EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel

OFFICELYTE 600 4000K C90 HE EM 2069529

Mount	Ceiling recessed mounting
General application	Office, Education
Operating temperature range (°C)	5°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3, 150
Luminaire efficacy (lm/W)	119
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Luminous Intensity (cd)	1740
Beam Angle (°)	87
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	345
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	26.5
Primary Supply/Product voltage - min (V)	240.0
Primary Supply/Product voltage - max (V)	220.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No

OFFICELYTE 600 4000K C90 HE EM 2069529

Dimming method	N/A
Drive current (mA)	650
Inrush Current (A)	21
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	80
Max. products per 16A B Breaker	50
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B50	93000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	90
Weight (kg)	5.7

PACKAGING

Product EAN number	5025768695294
Packaging single length / height (cm)	67.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	61.5
DUN14 (inner)	05025768695294

Concord

OFFICELYTE 600 4000K C90 HE EM
2069529

Units per outer package	1
Packaging outer length / height (cm)	67.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	61.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-35
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No