

INSTAR TREND 75 SW IP44 BA No-LMP
0079061



Features

- INSTAR TREND SW IP44 INDOOR BA is the recessed housing frame to use with RefLED GU10 spotlight lamp Ø50mm - GU10 spotlight not included. Aluminium body, round bezel ring in brushed aluminium finish, IP44 degree of protection, class II, Suitable for internal environment only.


Product Overview

Product name	INSTAR TREND 75 SW IP44 BA No-LMP
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Light source included	Fixture without Lightsource
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Total power consumption (W)	0.1
Electrical protection	Class III
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Housing colour	Aluminium
IP rating	IP44/20


INSTAR TREND 75 SW IP44 BA No-LMP
0079061

IK rating	IK02
Product EAN number	5410288790619
Warranty	3 years
Dimming method	N/A


Photometry

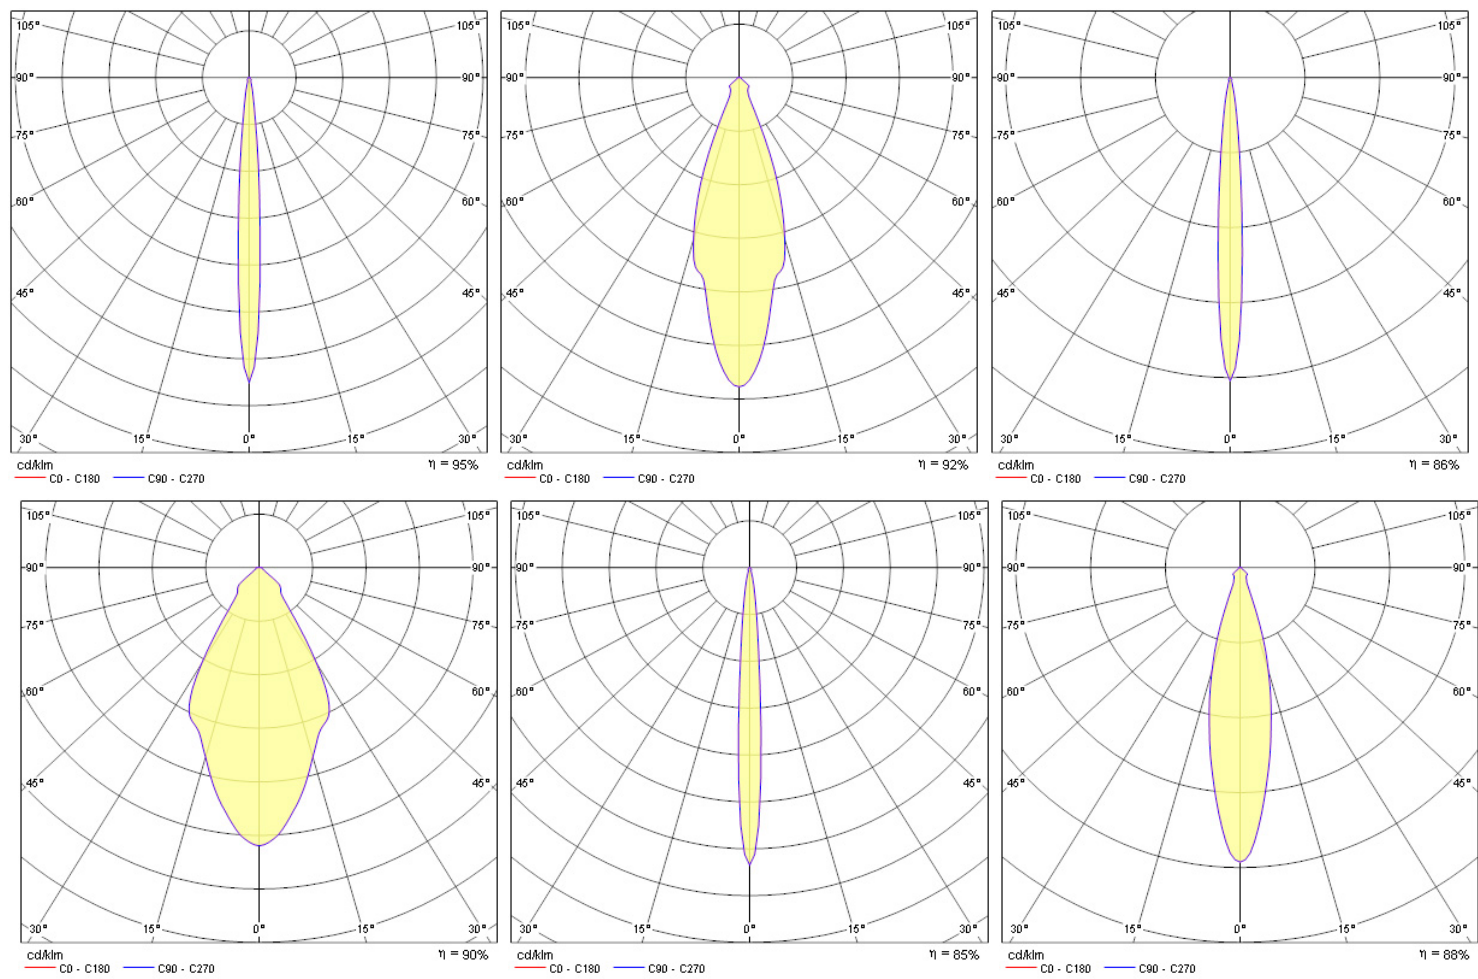


INSTAR TREND 75 SW IP44 BA No-LMP
0079061

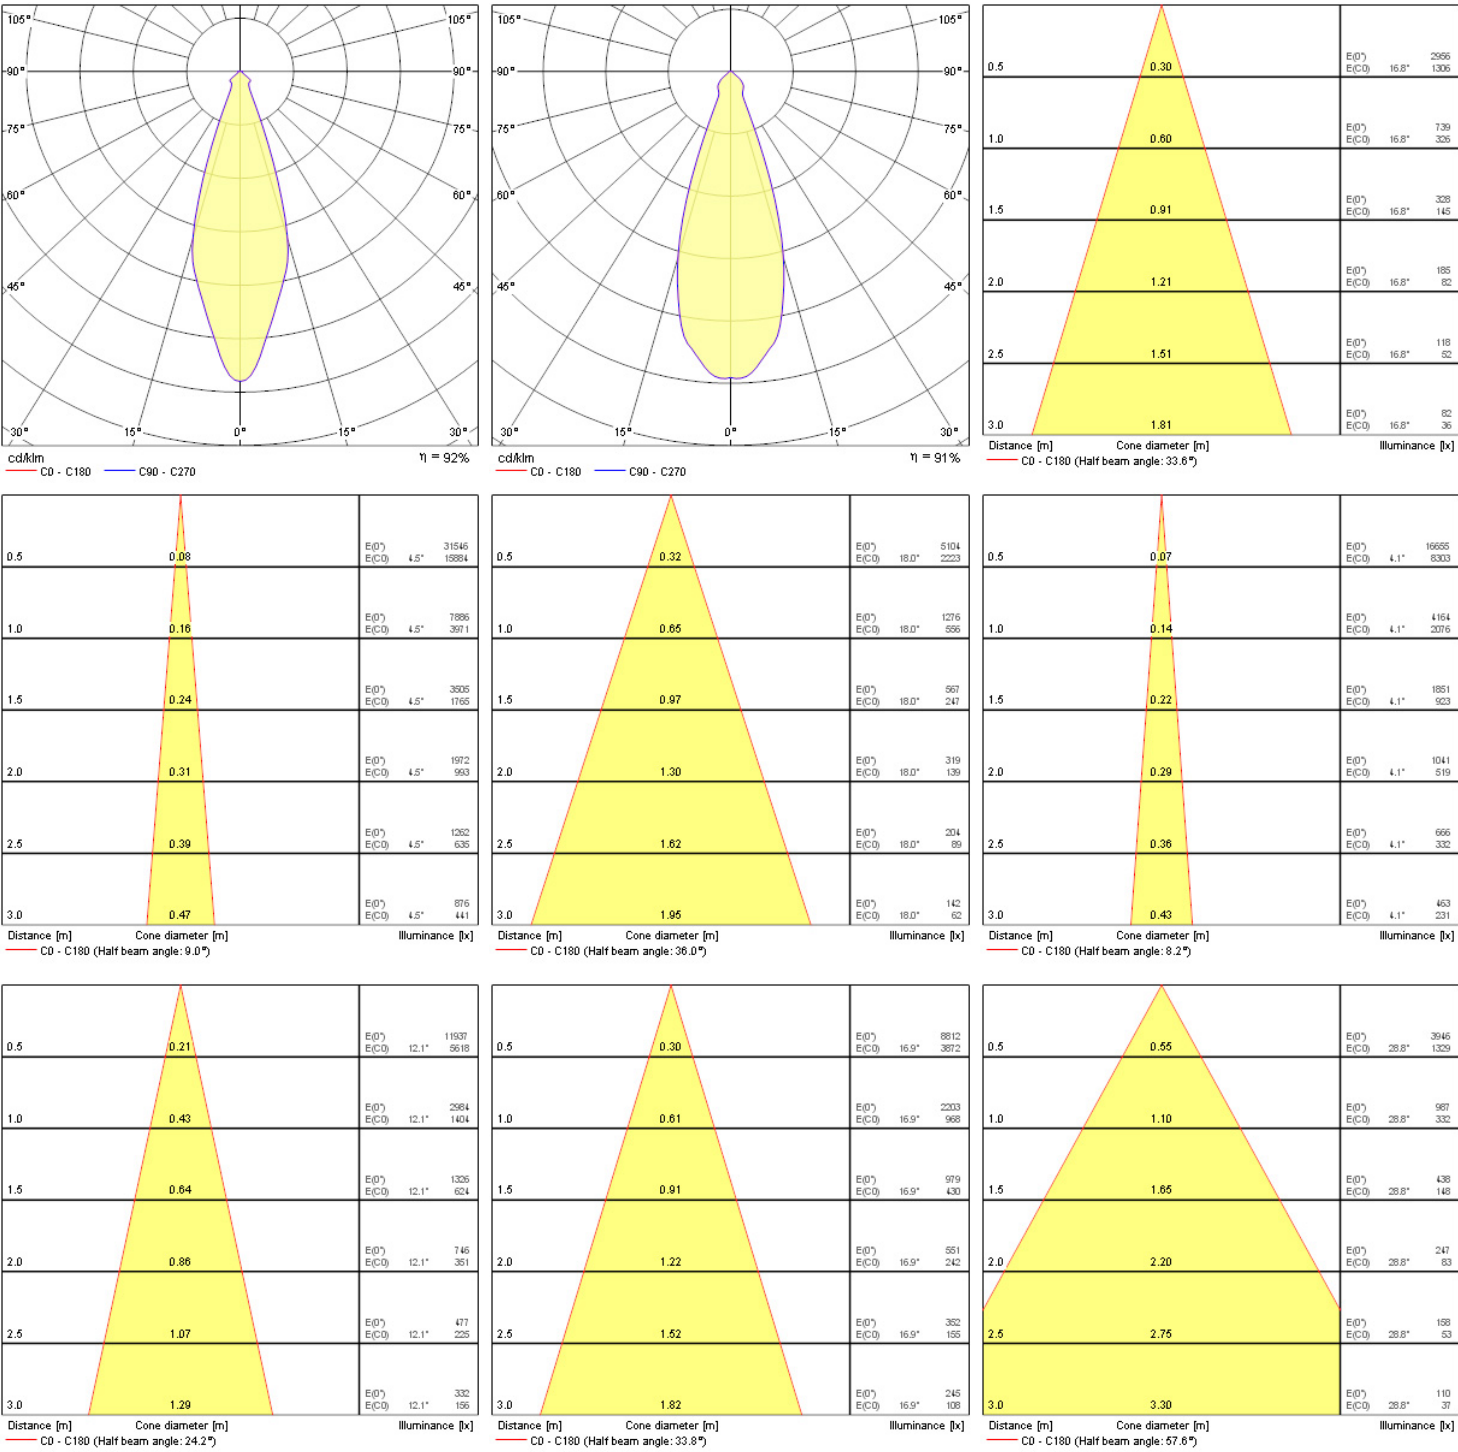

INSTAR TREND 75 SW IP44 BA No-LMP
0079061

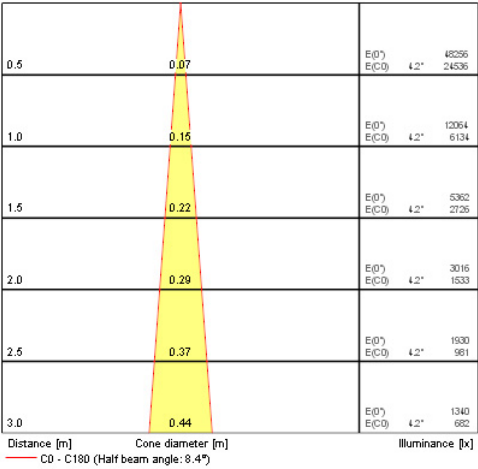

Technical drawings

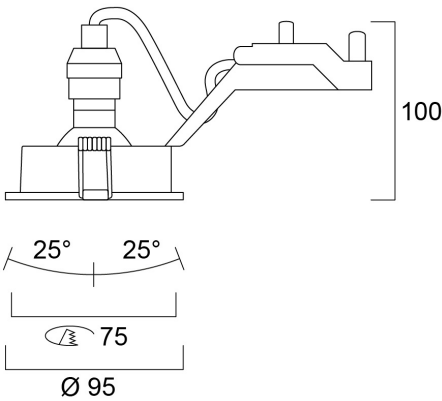

Data table

GENERAL DATA

Product name	INSTAR TREND 75 SW IP44 BA No-LMP
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium

INSTAR TREND 75 SW IP44 BA No-LMP 0079061

Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
ETIM Class	EC001744
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Distribution type	Symmetric
Photobiological Risk Group	Not applicable

ELECTRICAL DATA

Light source included	Fixture without Lightsource
Total power consumption (W)	0.1
Current (A)	0.001
Primary Supply/Product voltage - min (V)	12.0
Primary Supply/Product voltage - max (V)	12.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	1
Electrical protection	Class III
Control gear required	Yes
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60/HF
Max. products per 10A C Breaker	20
Max. products per 16A C Breaker	30

INSTAR TREND 75 SW IP44 BA No-LMP 0079061

Connectable conductor cross section - Max (mm ²)	1.5
--	-----

PHYSICAL DATA

Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Height (mm)	85
Nominal Product Diameter (mm)	83
Built-in diameter (mm)	75
Max. Lamp Diameter (mm) - D	95
Weight (kg)	0.174
Recessed Depth (mm)	90

PACKAGING

Product EAN number	5410288790619
Packaging single length / height (cm)	13.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	15410288790616
Units per outer package	30
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	28.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

