

Features

• Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyers. Body Size diameter 400mm. Besa mounting box compatible, hole distance 51 & 78mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. With the help of DIP Switch multiple lumen outputs can be set up in 4 steps (4000K: 24W 2500lm, 28W 3000lm, 32W 3500lm, 36W 4000lm). Efficacy up to 111lm/W. Non-dimmable. Equipped with integrated self test 3 hours LiFePO4 emergency kit. Lumen output in emergency mode: 400lm (3000K) / 430lm (4000K). IK03, IP54. Low maintenance with lifespan 120,000 hours L70:B50.


Product Overview

Product name	START Surface IP54 2500-4000lm 830/840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Hospitality, Museums & Galleries
ETIM Class	EC002892
E-number FI	4279515
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	111
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	430

START Surface IP54 2500-4000lm 830/840 EM 0043413

Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9003
IP rating	IP54
IK rating	IK03
Product EAN number	5410288434131
Warranty	5 years
Dimming method	N/A

Photometry

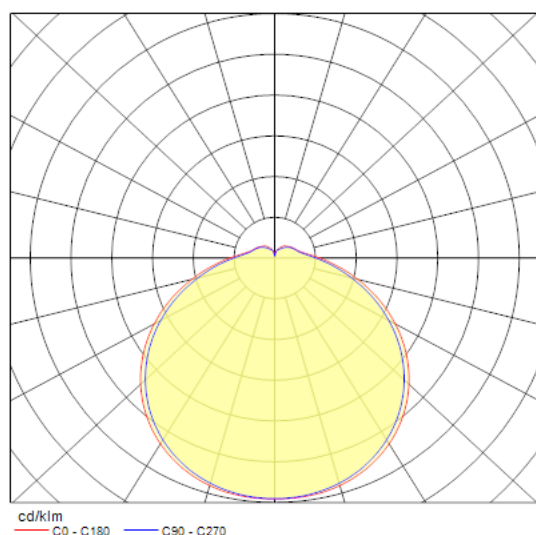

Technical drawings

