

### Features

- Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Special LED light source for BREAD applications, ideal for enhancing the nuances of golden bread, gold shade gives a more "greedy" appearance at the counter Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured black finishing colour Light color temperature: 2400K, Special spectrum for FOOD applications System power: 40W, Fixture lumen output: 3400lm, efficacy: 85lm/W, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm 5 years warranty Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.


### Product Overview

Product name	PIXO LARGE FOOD BREAD NB MB WB BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting

## PIXO LARGE FOOD BREAD NB MB WB BLACK 0004597

General application	Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	85
Correlated colour temperature (k)	2400
Light colour	N/A
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	40
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288045979
Warranty	5 years
Dimming method	N/A

### Technical drawings

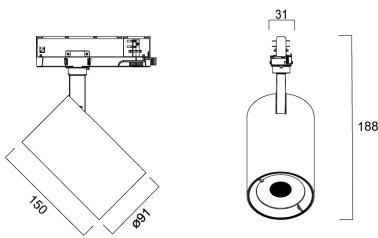

### Data table

#### GENERAL DATA

## PIXO LARGE FOOD BREAD NB MB WB BLACK 0004597

Product name	PIXO LARGE FOOD BREAD NB MB WB BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	25°C...+25°C
ETIM Class	EC001744
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	85
Correlated colour temperature (k)	2400
Light colour	N/A
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	36
Distribution type	Symmetric
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	40
Current (A)	0.17
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No

## PIXO LARGE FOOD BREAD NB MB WB BLACK 0004597

Dimming method	N/A
Inrush Current (A)	48
Inrush Duration ( $\mu$ s)	4
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	32
Max. products per 20A C Breaker	40
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	16
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	25

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B50	85000
Lifespan L90 B50	41000

### PHYSICAL DATA

Housing colour	Black
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Reflector finish	High-gloss
Nominal Product Length (mm)	150
Nominal Product Diameter (mm)	91
Weight (kg)	0.74

### PACKAGING

Product EAN number	5410288045979
Packaging single length / height (cm)	21.5

## PIXO LARGE FOOD BREAD NB MB WB BLACK 0004597

Packaging single width (cm)	12.7
Packaging single depth (cm)	22.3
DUN14 (inner)	15410288045976
Units per outer package	8
Packaging outer length / height (cm)	53.0
Packaging outer width (cm)	44.5
Packaging outer depth (cm)	25.0

### SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	25-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No