

Start Flood IP65 3000LM 830 Black
0050162




Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 3000 lm, 26 W, 115 lm/W, 3000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 112 x 125 x 26 mm (L x W x H). Weight: 0.325 kg.

Product Overview

Cap/Base	N/A
Control gear type	Not required

Photometry

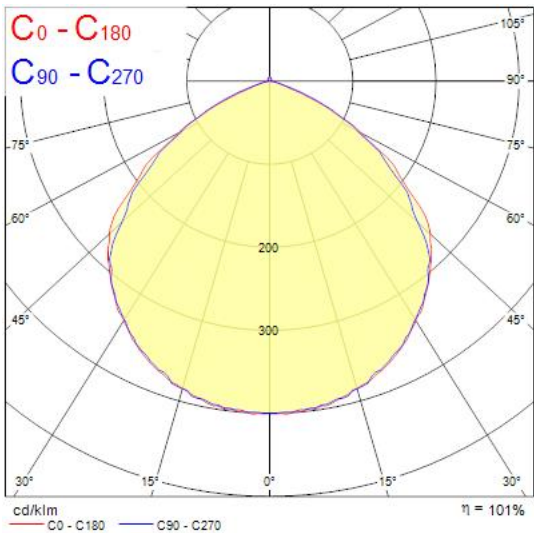

Technical drawings

