

Insaver Slim UGR19 220 2300lm 830 Surface
0030318



Features

- Insaver Slim is a surface mounted LED downlight ,Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2300lm; 115lm/W; 3000K; UGR <19 with height of 95 mm. Meets TP(a) requirements.


Product Overview

Product name	Insaver Slim UGR19 220 2300lm 830 Surface
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278057
Fixture luminous flux (lm)	2300
Luminaire efficacy (lm/W)	115
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II

Insaver Slim UGR19 220 2300lm 830 Surface 0030318

Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP20
IK rating	IK07
Product EAN number	5410288303185
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	2300

Photometry

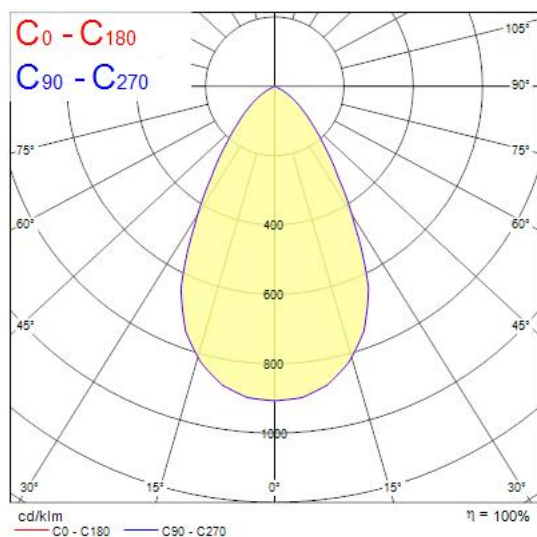

Technical drawings

