

Inverto Direct NW Eb Black
3081025



Features

- Surface Wall mounted luminaire, wire to base with pluggable connection for easy installation, suitable for looping, black coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP65, IK07, lifespan: 60,000hrs (L80:B20), 162 x 110 x 110 mm.


Product Overview

Product name	Inverto Direct NW Eb Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
Environment	Internal/External
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579333
Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No


Inverto Direct NW Eb Black
3081025

Housing colour	RAL9005
IP rating	IP65
IK rating	IK07
Product EAN number	8711971810254
Warranty	5 years
Dimming method	N/A

Photometry

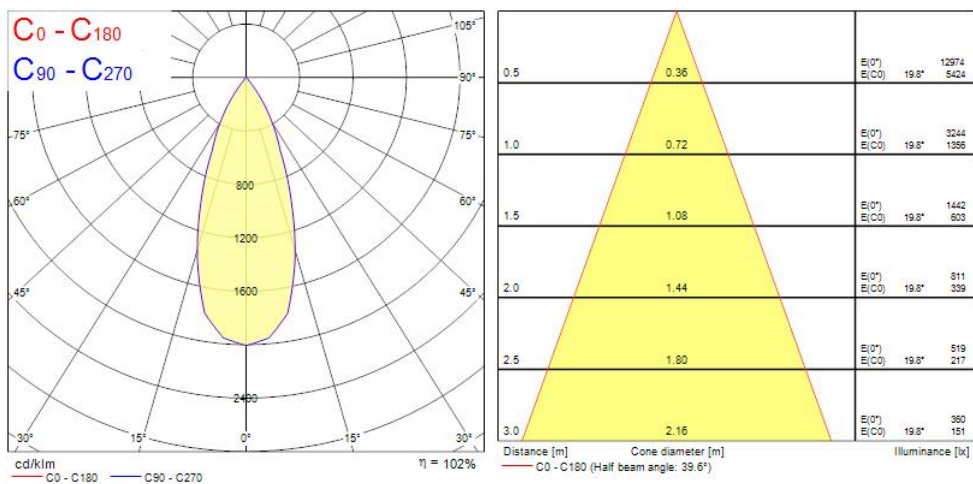

Technical drawings

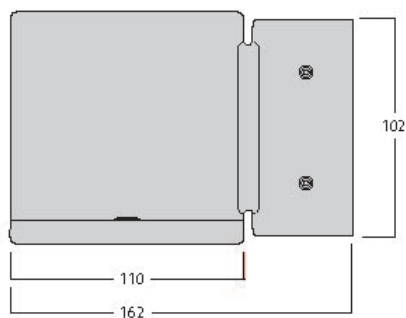

Inverto Direct NW Eb Black 3081025

Data table

GENERAL DATA

Product name	Inverto Direct NW Eb Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
Environment	Internal/External
General application	Hospitality
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4579333
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	40
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	16
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240

Inverto Direct NW Eb Black 3081025

Lamp power factor	0.95
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	10
Inrush Duration (µs)	152
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	75
Max. products per 13A C Breaker	91
Max. products per 16A C Breaker	106
Max. products per 20A C Breaker	126
Max. products per 10A B Breaker	45
Max. products per 13A B Breaker	55
Max. products per 16A B Breaker	64
Max. products per 20A B Breaker	76

LIFETIME DATA

Lifespan L70 B50	60000
Lifespan L80 B20	60000
Lifespan L90 B10	56100

PHYSICAL DATA

Housing colour	RAL9005
IP rating	IP65
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	162
Nominal Product Width (mm)	110



Inverto Direct NW Eb Black
3081025

Nominal Product Height (mm)	110
Weight (kg)	1.461

PACKAGING

Product EAN number	8711971810254
Packaging single length / height (cm)	23.5
Packaging single width (cm)	19.4
Packaging single depth (cm)	11.5
DUN14 (inner)	08711971810254
Units per outer package	1
Packaging outer length / height (cm)	23.5
Packaging outer width (cm)	19.4
Packaging outer depth (cm)	11.5

SAFETY DATA

Optimal operating condition (°C)	-25-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No