

Inverto Direct WW Eb Rust
3081088



Features

- Surface Wall mounted luminaire, wire to base with pluggable connection for easy installation, suitable for looping, rust coloured aluminium housing, 1,566lm, 16W, 98lm/W, 3000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP65, IK07, lifespan: 60,000hrs (L80:B20), 162 x 110 x 110 mm.


Product Overview

Product name	Inverto Direct WW Eb Rust
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
Environment	Internal/External
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579332
Fixture luminous flux (lm)	1566
Luminaire efficacy (lm/W)	98
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No

Inverto Direct WW Eb Rust
3081088

IP rating	IP65
IK rating	IK07
Product EAN number	8711971810889
Warranty	5 years
Dimming method	N/A

Photometry

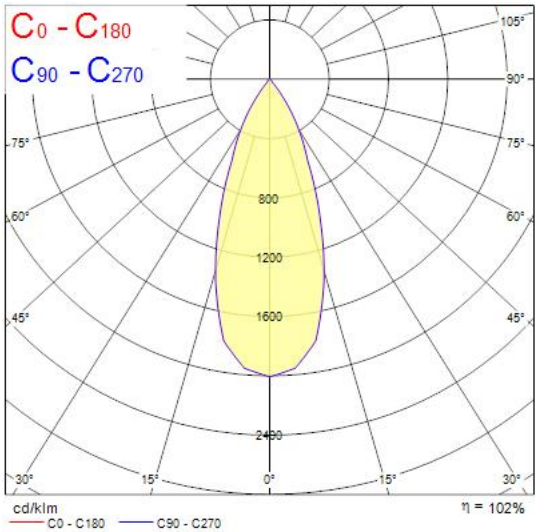

Technical drawings

