



Features


- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent GLS lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- A+ energy rating

Product Overview

Product name	ToLEDo GLS V6 806LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	8.5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740291
E-number SE	8296521
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Beam Angle (°)	180
Wattage (W)	8.5
Power consumption (W)	8.5
Average life (Nominal) (h)	15000
Product EAN number	5410288266725
Warranty	3 years
Useful luminous flux (#use)	806

ToLEDo GLS V6 806LM 827 E27 SL
0026672

Technical drawings

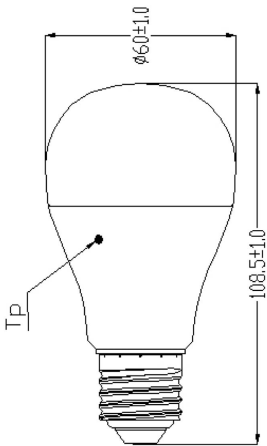

Data table

GENERAL DATA

Product name	ToLEDo GLS V6 806LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	8.5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740291
E-number SE	8296521
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	806
Luminous flux (Rated) (lm)	806

ToLEDo GLS V6 806LM 827 E27 SL 0026672

Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Beam Angle (°)	180
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	8.5
Wattage (W)	8.5
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
Control gear required	No
No. Of switching cycles before premature failures	>50000
Inrush Current (A)	2.4
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	173
Max. products per 16A C Breaker	278
Max. products per 20A C Breaker	348

LIFETIME DATA

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

PHYSICAL DATA

Nominal Product Length (mm)	112
Nominal Product Diameter (mm)	60
Weight (kg)	0.056



ToLEDo GLS V6 806LM 827 E27 SL
0026672

PACKAGING

Product EAN number	5410288266725
Packaging single length / height (cm)	11.3
Packaging single width (cm)	6.4
Packaging single depth (cm)	6.4
DUN14 (inner)	15410288266722
Units per inner package	6
Packaging inner length / height (cm)	20.4
Packaging inner width (cm)	13.4
Packaging inner depth (cm)	13.7
DUN14 (outer)	25410288266729
Units per outer package	60
Packaging outer length / height (cm)	72.4
Packaging outer width (cm)	22.2
Packaging outer depth (cm)	29.7

SAFETY DATA

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures