



Features

- ToLEDo R7s is a retrofit replacement for traditional halogen double-ended linear R7s lamps The slim design and glass construction give the same look and feel of traditional halogen R7s lamp Omni-directional light distribution High lumen efficacy Lumen output: 850lm 85% energy saving Length: 118mm Non-Dimmable 15,000 hours average rated life Ideal for domestic and commercial applications



Product Overview

Product name	ToLEDo Retro R7s 118MM 850LM 827 SL
Technology	LED
Watt (Rated) (W)	7.7
Cap/Base	R7s
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741121
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Wattage (W)	7.7
Power consumption (W)	7.7
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288296845

ToLEDo Retro R7s 118MM 850LM 827 SL
0029684

Warranty	3 years
Useful luminous flux (#use)	850

Technical drawings

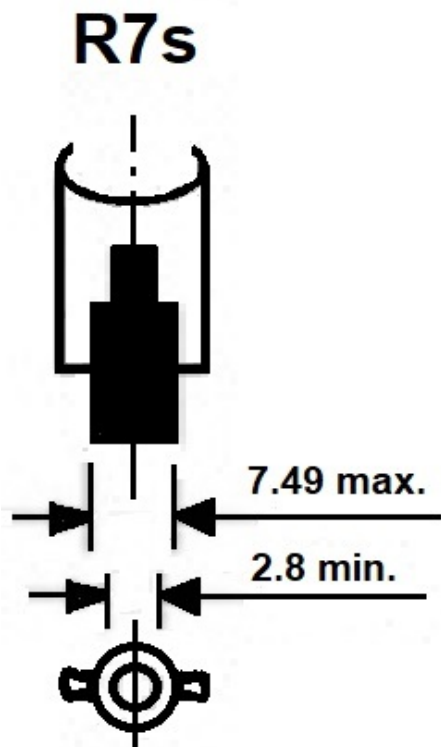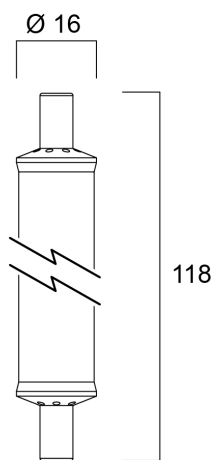

Data table

GENERAL DATA

Product name	ToLEDo Retro R7s 118MM 850LM 827 SL
Technology	LED
Watt (Rated) (W)	7.7
Cap/Base	R7s
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C

ToLEDo Retro R7s 118MM 850LM 827 SL 0029684

Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741121
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	850
Luminous flux (Rated) (lm)	850
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	7.7
Wattage (W)	7.7
Equivalent watt (W)	60
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	1.2
Inrush Duration (µs)	520
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	133
Max. products per 16A B Breaker	66



ToLEDo Retro R7s 118MM 850LM 827 SL
0029684

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

PHYSICAL DATA

Nominal Product Length (mm)	118
Nominal Product Diameter (mm)	17
Weight (kg)	0.013

PACKAGING

Product EAN number	5410288296845
Packaging single length / height (cm)	12.0
Packaging single width (cm)	4.5
Packaging single depth (cm)	4.5
DUN14 (inner)	15410288296842
Units per outer package	6
Packaging outer length / height (cm)	14.3
Packaging outer width (cm)	9.7
Packaging outer depth (cm)	13.0


SAFETY DATA

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label



0029684

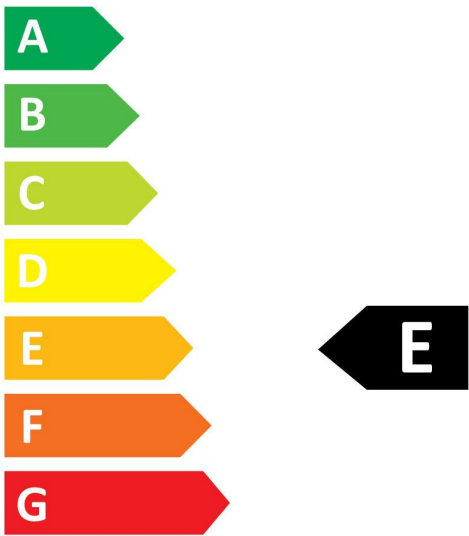


8
kWh/1000h



2019/2015



0029684

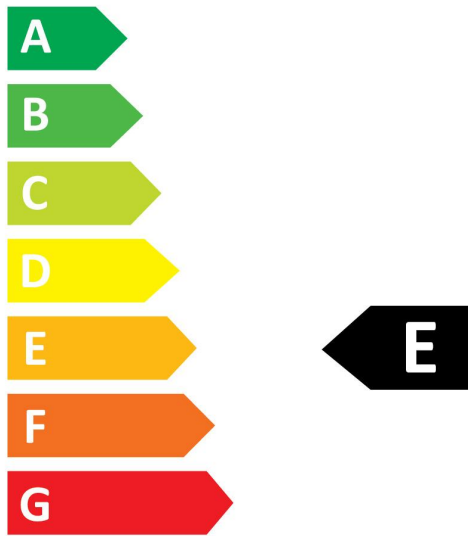

8
kWh/1000h



2019/2015