

RESISTO 1500 HE IP66 DALI 4000LM 840 EM
0010357



Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4000lm; 29W; 138lm/W; 4000K; SDCM<3; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour LiFePO4 maintained emergency batteries (600lm emergency lm output).


Product Overview

Product name	RESISTO 1500 HE IP66 DALI 4000LM 840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	138
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110
Glare control	< 22
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	700

RESISTO 1500 HE IP66 DALI 4000LM 840 EM
0010357

Total power consumption (W)	29
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288103570
Warranty	5 years
Dimming method	N/A

Photometry

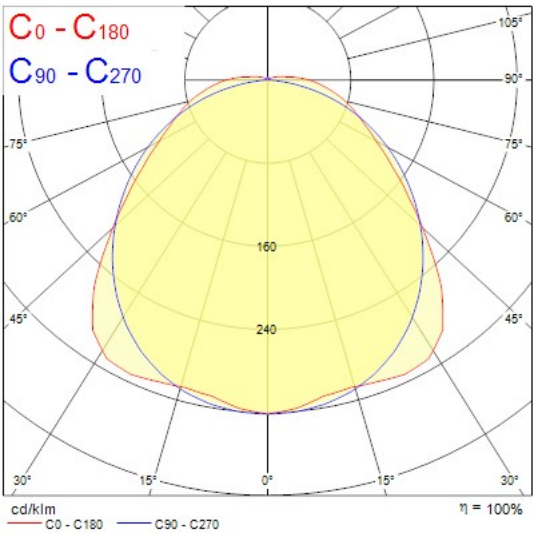

Technical drawings

