### Concord

#### EQUINOX 165 2500 940 SSC01D 2059937




















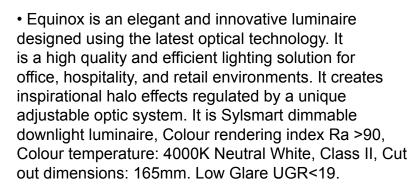



#### **Product Overview**


Product name	EQUINOX 165 2500 940 SSC01D
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Office
ETIM Class	EC001744
Fixture luminous flux (Im)	2500
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	64
Glare control	< 19

## Concord

# EQUINOX 165 2500 940 SSC01D **2059937**

Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Minimum dimming level (%)	1
Housing colour	RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768599370
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	2500

### **Photometry**



### **Technical drawings**

