


START FLOOD IP65 2000LM 840 BLACK  
0050174

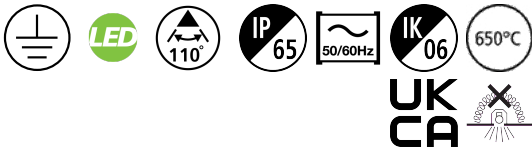

Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2000 lm, 17 W, 118 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 100 x 108 x 23 mm (L x W x H). Weight: 0.26 kg.


Product Overview

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Product name                      | START FLOOD IP65 2000LM 840 BLACK |
| Technology                        | LED                               |
| Cap/Base                          | N/A                               |
| Housing                           | Aluminium                         |
| Mount                             | Floor standing                    |
| General application               | Retail                            |
| ETIM Class                        | EC001744                          |
| Fixture luminous flux (lm)        | 2000                              |
| Luminaire efficacy (lm/W)         | 118                               |
| Correlated colour temperature (k) | 4000                              |
| Light colour                      | Neutral White                     |
| CRI (Ra)                          | 80                                |
| Colour Variation Initial (SDCM)   | 5                                 |
| Beam Angle (°)                    | 110                               |
| Photobiological Risk Group        | RG1                               |
| Total power consumption (W)       | 17                                |
| Electrical protection             | Class I                           |
| Control gear type                 | Not required                      |

## START FLOOD IP65 2000LM 840 BLACK 0050174

|                             |               |
|-----------------------------|---------------|
| Dimmable                    | No            |
| Housing colour              | Black         |
| IP rating                   | IP65          |
| IK rating                   | IK06          |
| Product EAN number          | 5410288501741 |
| Warranty                    | 3 years       |
| Dimming method              | N/A           |
| Useful luminous flux (#use) | 2000          |

### Photometry

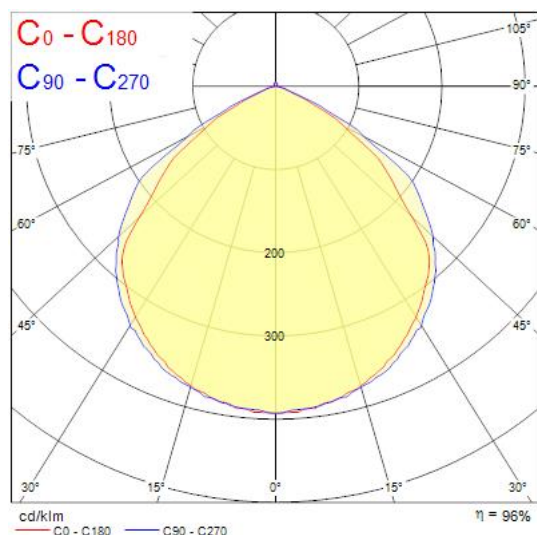

### Technical drawings

