

START Downlight Flat 206 SQ IP44 1700LM 840 DIM
0054127



Features

- Start Downlight Flat 206 SQ IP44 1700LM 840 DIM




Product Overview

Product name	START Downlight Flat 206 SQ IP44 1700LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003

START Downlight Flat 206 SQ IP44 1700LM 840 DIM 0054127

IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541273
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	1700

Photometry

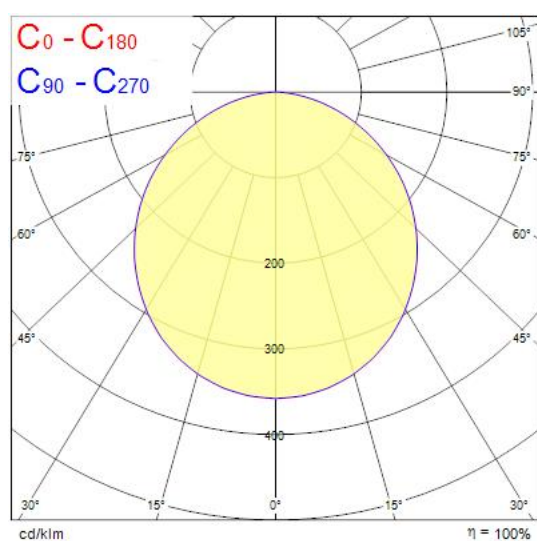

Technical drawings

