

START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH
0043514



Features

• Ceiling / wall round luminaire with integrated LED. Perfect solution for corridors, circulation areas or bathrooms. Even and uniform light in a slim but robust design. Power 18 W, lumen output 1900 lumens, lumen efficacy 105 lm/W, dual color temperature (3000K/4000K). Supplied with non dimmable driver and built in motion sensor. Default settings as Stand-by time 0s, Stand-by dim level 15%, Daylight 10lux, Hold-time 60s, Sensitivity 100%. Mains Voltage 220-240V~. Body Size: 280mm diameter x 53mm height. IK07, IP54 Protection rating. PC Polycarbonate Opal diffuser. Low maintenance with 65000 hours LED lifespan expectancy. Warranty: 5 years.


Product Overview

Product name	START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
General application	Hospitality
ETIM Class	EC002892
E-number FI	4278450
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	105
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	4
Beam Angle (°)	120
Photobiological Risk Group	RG0

START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH
0043514

Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP54
IK rating	IK07
Product EAN number	5410288435145
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	1900

Photometry

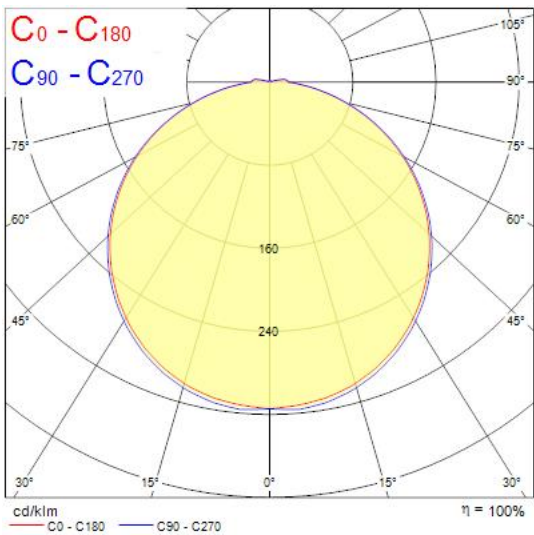

Technical drawings

