



Features

• Linear LED Luminaire, RAL9003 (white) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, lenses with prismatic diffuser, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRi (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), non-dimmable driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip swicth in direct mode (22-24W), max system power: 24W, max fixture output: 3350lm @ 4000K CCT, efficacy at max output 140lm/W, additional 2-steps power dip switch when indirect module added (34-36W), max system power in D/I combination: 36W, max fixture output: 4850lm @ 4000K CCT, efficacy at max output 135lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.



Product Overview

Product name	OTAO LINEAR 1.2 PRIS 830/840 MP WH
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
General application	Office, Education

OTAO LINEAR 1.2 PRIS 830/840 MP WH 0041802

ETIM Class	EC002892
E-number FI	4170587
Fixture luminous flux (lm)	3350
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Product EAN number	5410288418025
Warranty	5 years
Dimming method	N/A


Photometry

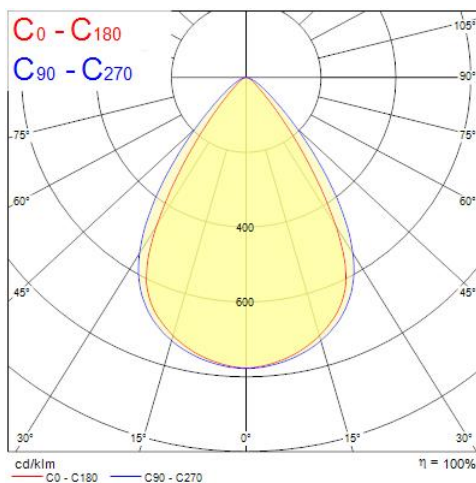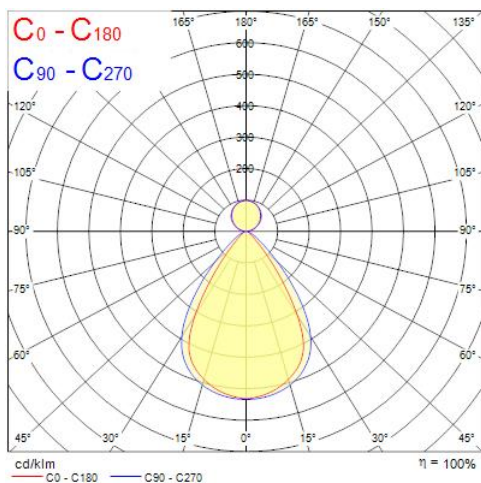


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.80 0.65	10318	38.6°	2474	33.1°
1.0	1.60 1.30	2580	38.6°	619	33.1°
1.5	2.39 1.96	1146	38.6°	275	33.1°
2.0	3.19 2.61	645	38.6°	155	33.1°
2.5	3.99 3.26	413	38.6°	99	33.1°
3.0	4.79 3.91	287	38.6°	69	33.1°

Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 66.2°)
 C90 - C270 (Half beam angle: 77.2°)

OTAO LINEAR 1.2 PRIS 830/840 MP WH
0041802

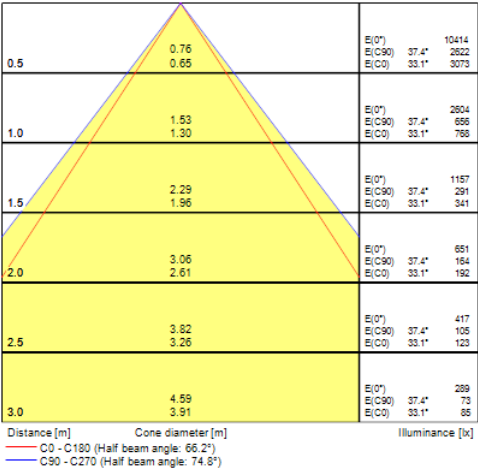

Technical drawings

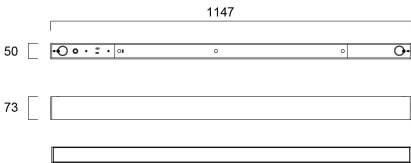

Data table

GENERAL DATA

Product name	OTAO LINEAR 1.2 PRIS 830/840 MP WH
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002892
E-number FI	4170587

OTAO LINEAR 1.2 PRIS 830/840 MP WH 0041802

Warranty	5 years
----------	---------

OPTICAL DATA

Fixture luminous flux (lm)	3350
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Inrush Current (A)	7.2
Inrush Duration (µs)	190
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	39

OTAO LINEAR 1.2 PRIS 830/840 MP WH 0041802

Max. products per 16A C Breaker	62
Max. products per 10A B Breaker	39
Max. products per 16A B Breaker	62
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L90 B50	48000

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1147
Nominal Product Width (mm)	50
Nominal Product Height (mm)	73
Weight (kg)	1.75

PACKAGING

Product EAN number	5410288418025
Packaging single length / height (cm)	122.0
Packaging single width (cm)	6.1
Packaging single depth (cm)	7.8
DUN14 (inner)	15410288418022
Units per outer package	4
Packaging outer length / height (cm)	124.0
Packaging outer width (cm)	14.2
Packaging outer depth (cm)	19.4



OTAO LINEAR 1.2 PRIS 830/840 MP WH
0041802

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No