


## CONCORD BEACON 4000K MEDIUM O/B DIM WHITE 2062456

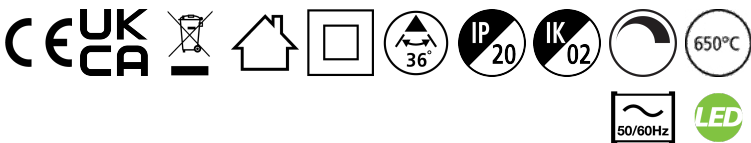

### Features

• Simple and slick integral design with no driver box and without any visible screws  
New technology utilization for improved performance  
Invisible in-track adaptor for an impressive architectural look  
Extremely precise light beams due to the high-quality lenses  
#80mm die-cast aluminium body, Fix beam angle: 36° , Textured white finishing colour  
Light color temperature: 4000K, natural light  
System power: 18W, Fixture lumen output: 1675lm, efficacy: 93lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation  
Operating voltage 220-240V / 50-60Hz, dimmable via on-board potentiometer, Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack  
Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only  
Horizontal rotation: 355°, vertical tilt: 90°  
Nominal product dimensions: D.80mmx200mm  
5 years warranty. Suitable for track mounting


### Product Overview

|                            |                                           |
|----------------------------|-------------------------------------------|
| Product name               | CONCORD BEACON 4000K MEDIUM O/B DIM WHITE |
| Technology                 | LED                                       |
| Cap/Base                   | N/A                                       |
| Housing                    | Aluminium                                 |
| Mount                      | Track mounting                            |
| Fixture rating             | Enclosed                                  |
| General application        | Museums & Galleries, Retail, Hospitality  |
| ETIM Class                 | EC001744                                  |
| Fixture luminous flux (lm) | 1675                                      |

## CONCORD BEACON 4000K MEDIUM O/B DIM WHITE 2062456

|                                   |                             |
|-----------------------------------|-----------------------------|
| Luminaire efficacy (lm/W)         | 93                          |
| LOR (%)                           | 100                         |
| Correlated colour temperature (k) | 4000                        |
| Light colour                      | Neutral White               |
| CRI (Ra)                          | 97                          |
| Colour Variation Initial (SDCM)   | 2                           |
| Beam Angle (°)                    | 36                          |
| Photobiological Risk Group        | RG1                         |
| Total power consumption (W)       | 18                          |
| Electrical protection             | Class II                    |
| Control gear type                 | LED driver constant current |
| Dimmable                          | Yes                         |
| Minimum dimming level (%)         | 1                           |
| Housing colour                    | RAL9016                     |
| IP rating                         | IP20                        |
| IK rating                         | IK02                        |
| Product EAN number                | 5025768624560               |
| Warranty                          | 5 years                     |
| Dimming method                    | Onboard pot                 |
| Useful luminous flux (#use)       | 1625                        |

### Photometry

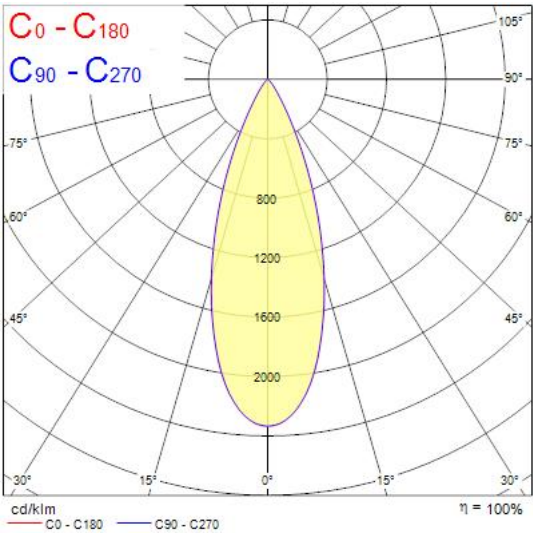

### Technical drawings

