

Features

- Integrated LED fire rated recessed spotlight, white bezel colour, three temperature light colours selectable: 3000K, 4000K, 6500K. Lumen output 540lm (4000K), 5.5W, dimmable trailing/leading edge, 60° degree beam angle, polycarbonate and steel body with aluminium bezel, low profile 60mm recessed depth, IP65 frontal degree, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 70-75mm cutout, clear lens. . Fire rated 30,60,90 minutes.


Product Overview

Product name	START Spot Fire 540lm 3CCT IP65 WH
Technology	LED
Cap/Base	N/A
Housing	Metal/plastic
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	540
Luminaire efficacy (lm/W)	98
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	60
Photobiological Risk Group	RG0
Total power consumption (W)	5.5
Electrical protection	Class II
Control gear type	LED driver constant current
Minimum dimming level (%)	10
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL9003

START Spot Fire 540lm 3CCT IP65 WH 0059830

IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288598307
Warranty	3 years
Dimming method	Mains: leading / trailing edge
Colour Code	840
Useful luminous flux (#use)	540

Photometry

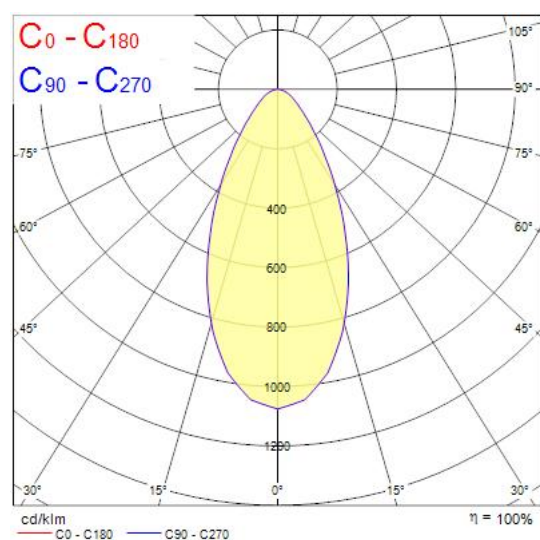

Technical drawings

