



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2800lm; 20W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; microwave motion sensor corridor function with infinite stand-by time and 10% stand-by level.


Product Overview

|                                   |                                                 |
|-----------------------------------|-------------------------------------------------|
| Product name                      | RESISTO 1200 IP66 MWCORINF 2800LM 840           |
| Technology                        | LED                                             |
| Cap/Base                          | N/A                                             |
| Housing                           | PC Polycarbonate                                |
| Mount                             | Ceiling recessed mounting, Wall surface mounted |
| General application               | Logistics & Industry                            |
| ETIM Class                        | EC002892                                        |
| Fixture luminous flux (lm)        | 2800                                            |
| Luminaire efficacy (lm/W)         | 140                                             |
| Correlated colour temperature (k) | 4000                                            |
| Light colour                      | Neutral White                                   |
| CRI (Ra)                          | 80                                              |
| Colour Consistency (SDCM)         | 5                                               |
| Colour Variation Initial (SDCM)   | 5                                               |
| Beam Angle (°)                    | 110                                             |
| Glare control                     | < 22                                            |
| Photobiological Risk Group        | RG1                                             |
| Total power consumption (W)       | 20                                              |

RESISTO 1200 IP66 MWCORINF 2800LM 840  
0010322


|                           |                             |
|---------------------------|-----------------------------|
| Electrical protection     | Class I                     |
| Control gear type         | LED driver constant current |
| Dimmable                  | Yes                         |
| Minimum dimming level (%) | 10                          |
| LED Flickering Rate       | Ultra low (5% or less)      |
| Housing colour            | Grey                        |
| IP rating                 | IP66                        |
| IK rating                 | IK08                        |
| Product EAN number        | 5410288103228               |
| Warranty                  | 5 years                     |
| Dimming method            | Other                       |

Photometry

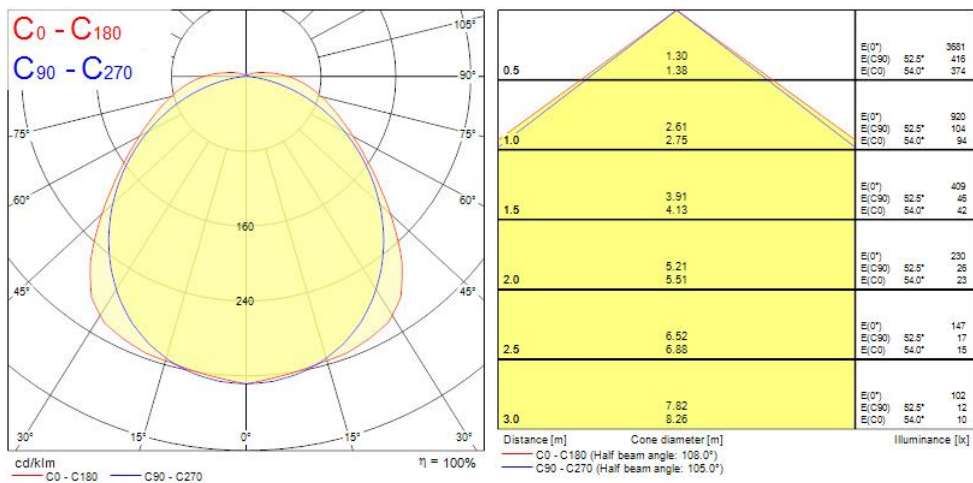

RESISTO 1200 IP66 MWCORINF 2800LM 840  
0010322

Technical drawings

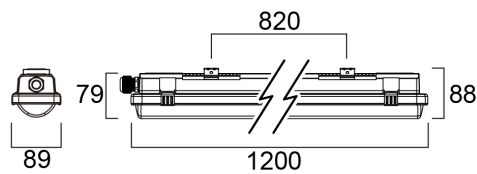

Data table

GENERAL DATA

|                                         |                                                 |
|-----------------------------------------|-------------------------------------------------|
| Product name                            | RESISTO 1200 IP66 MWCORINF 2800LM 840           |
| Technology                              | LED                                             |
| Cap/Base                                | N/A                                             |
| Housing                                 | PC Polycarbonate                                |
| Mount                                   | Ceiling recessed mounting, Wall surface mounted |
| General application                     | Logistics & Industry                            |
| Operating temperature range (°C)        | -20°C...+40°C                                   |
| Performance ambient temperature Tq (°C) | 25                                              |
| ETIM Class                              | EC002892                                        |
| Warranty                                | 5 years                                         |

OPTICAL DATA

|                                   |      |
|-----------------------------------|------|
| Fixture luminous flux (lm)        | 2800 |
| Luminaire efficacy (lm/W)         | 140  |
| Correlated colour temperature (k) | 4000 |

## RESISTO 1200 IP66 MWCORINF 2800LM 840 0010322

|                                 |               |
|---------------------------------|---------------|
| Light colour                    | Neutral White |
| CRI (Ra)                        | 80            |
| Colour Variation Initial (SDCM) | 5             |
| Colour Consistency (SDCM)       | 5             |
| Beam Angle (°)                  | 110           |
| Distribution type               | Diffuse       |
| Glare control                   | < 22          |
| Photobiological Risk Group      | RG1           |

### ELECTRICAL DATA

|                                                                       |                             |
|-----------------------------------------------------------------------|-----------------------------|
| Total power consumption (W)                                           | 20                          |
| Primary Supply/Product voltage - min (V)                              | 220                         |
| Primary Supply/Product voltage - max (V)                              | 240                         |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x % | 20                          |
| Electrical protection                                                 | Class I                     |
| Control gear required                                                 | No                          |
| Control gear type                                                     | LED driver constant current |
| No. Of switching cycles before premature failures                     | >50000                      |
| Dimmable                                                              | Yes                         |
| Dimming method                                                        | Other                       |
| Minimum dimming level (%)                                             | 10                          |
| Drive current (mA)                                                    | 350                         |
| Inrush Current (A)                                                    | 29                          |
| Inrush Duration (µs)                                                  | 180                         |
| Energy Efficiency Class (A->G) of contained light source              | D                           |
| Nominal Frequency (Hz)                                                | 50/60Hz                     |
| LED Flickering Rate                                                   | Ultra low (5% or less)      |
| Max. products per 10A C Breaker                                       | 21                          |
| Max. products per 13A C Breaker                                       | 28                          |
| Max. products per 16A C Breaker                                       | 36                          |
| Max. products per 20A C Breaker                                       | 45                          |
| Max. products per 10A B Breaker                                       | 13                          |

## RESISTO 1200 IP66 MWCORINF 2800LM 840 0010322

|                                                    |     |
|----------------------------------------------------|-----|
| Max. products per 13A B Breaker                    | 17  |
| Max. products per 16A B Breaker                    | 22  |
| Max. products per 20A B Breaker                    | 27  |
| Connectable conductor cross section -<br>Max (mm²) | 2.5 |

### LIFETIME DATA

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L70 B20 | 100000 |
| Lifespan L70 B10 | 100000 |
| Lifespan L80 B50 | 74000  |
| Lifespan L80 B20 | 69000  |
| Lifespan L80 B10 | 66000  |
| Lifespan L90 B50 | 35000  |
| Lifespan L90 B20 | 33000  |
| Lifespan L90 B10 | 31000  |

### PHYSICAL DATA

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | Grey             |
| IP rating                   | IP66             |
| IK rating                   | IK08             |
| Diffuser finish             | Frosted          |
| Diffuser material           | PC Polycarbonate |
| Nominal Product Length (mm) | 1200             |
| Nominal Product Width (mm)  | 87               |
| Nominal Product Height (mm) | 80               |
| Weight (kg)                 | 1.59             |

### PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288103228  |
| Packaging single length / height (cm) | 120.5          |
| Packaging single width (cm)           | 10.0           |
| Packaging single depth (cm)           | 8.5            |
| DUN14 (inner)                         | 05410288103228 |



RESISTO 1200 IP66 MWCORINF 2800LM 840  
0010322

|                                      |       |
|--------------------------------------|-------|
| Units per outer package              | 1     |
| Packaging outer length / height (cm) | 120.5 |
| Packaging outer width (cm)           | 10.0  |
| Packaging outer depth (cm)           | 8.5   |

SAFETY DATA

|                                     |        |
|-------------------------------------|--------|
| Glow Wire Test (°C)                 | 850    |
| Optimal operating condition (°C)    | -20-40 |
| Special purpose lamp                | No     |
| Dry applications use only           | No     |
| Suitable for household illumination | No     |