

RESISTO 1500 HE IP66 DALI 7100LM 840 EM  
0010355



Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7100lm; 50W; 142lm/W; 4000K; SDCM<3; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour LiFePO4 maintained emergency batteries (600lm emergency lm output).


Product Overview

|                                   |                                                           |
|-----------------------------------|-----------------------------------------------------------|
| Product name                      | RESISTO 1500 HE IP66 DALI 7100LM 840 EM                   |
| Technology                        | LED                                                       |
| Cap/Base                          | N/A                                                       |
| Housing                           | PC Polycarbonate                                          |
| Mount                             | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application               | Logistics & Industry                                      |
| ETIM Class                        | EC002892                                                  |
| Fixture luminous flux (lm)        | 7100                                                      |
| Luminaire efficacy (lm/W)         | 142                                                       |
| Correlated colour temperature (k) | 4000                                                      |
| Light colour                      | Neutral White                                             |
| CRI (Ra)                          | 80                                                        |
| Colour Variation Initial (SDCM)   | 3                                                         |
| Beam Angle (°)                    | 110                                                       |
| Glare control                     | < 22                                                      |
| Photobiological Risk Group        | RG1                                                       |
| Luminous flux (emergency) (lm)    | 670                                                       |

## RESISTO 1500 HE IP66 DALI 7100LM 840 EM 0010355

|                             |                             |
|-----------------------------|-----------------------------|
| Total power consumption (W) | 50                          |
| Electrical protection       | Class I                     |
| Control gear type           | LED driver constant current |
| Dimmable                    | No                          |
| Housing colour              | Grey                        |
| IP rating                   | IP66                        |
| IK rating                   | IK08                        |
| Product EAN number          | 5410288103556               |
| Warranty                    | 5 years                     |
| Dimming method              | N/A                         |

### Photometry

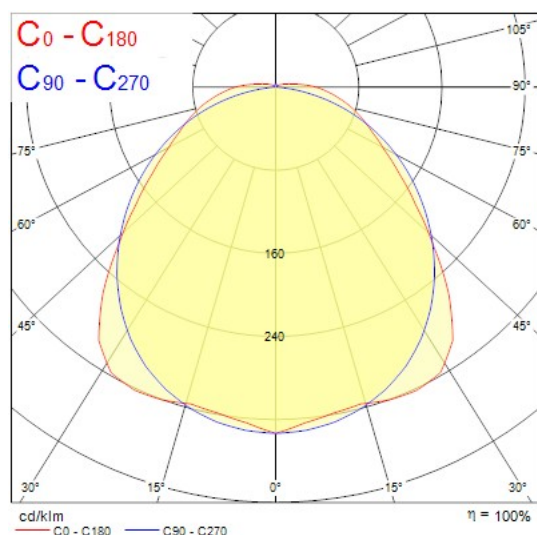

### Technical drawings

