

START SURFACE IP66 1450LM 830 EM3 IK10 WHT  
0049008



Features

- LED exterior surface mounted luminaire, 350mm diameter, 1450lm as max. lumen output, 17W max. power consumption, 85lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant. Integrated emergency, 3 hours, supplied with anti-theft screws


Product Overview

|                                   |                                            |
|-----------------------------------|--------------------------------------------|
| Product name                      | START SURFACE IP66 1450LM 830 EM3 IK10 WHT |
| Technology                        | LED                                        |
| Cap/Base                          | N/A                                        |
| Housing                           | PC Polycarbonate                           |
| Mount                             | Ceiling surface mounting                   |
| Environment                       | Indoor, Outdoor                            |
| General application               | Hospitality                                |
| ETIM Class                        | EC002892                                   |
| Fixture luminous flux (lm)        | 1450                                       |
| Luminaire efficacy (lm/W)         | 85                                         |
| LOR (%)                           | 100                                        |
| Correlated colour temperature (k) | 3000                                       |
| Light colour                      | Warm White                                 |
| CRI (Ra)                          | 80                                         |
| Colour Variation Initial (SDCM)   | 6                                          |
| Beam Angle (°)                    | 120                                        |
| Glare control                     | < 25                                       |
| Photobiological Risk Group        | RG0                                        |
| Luminous flux (emergency) (lm)    | 124                                        |
| Total power consumption (W)       | 17                                         |
| Electrical protection             | Class II                                   |
| Control gear type                 | LED driver constant current                |

START SURFACE IP66 1450LM 830 EM3 IK10 WHT  
0049008

|                             |                        |
|-----------------------------|------------------------|
| Control gear mounting       | Integrated             |
| LED Flickering Rate         | Ultra low (5% or less) |
| Housing colour              | RAL9003                |
| IP rating                   | IP66                   |
| IK rating                   | IK10                   |
| Product EAN number          | 5410288490083          |
| Warranty                    | 5 years                |
| Dimming method              | N/A                    |
| Colour Code                 | 830                    |
| Useful luminous flux (#use) | 1450                   |

Photometry

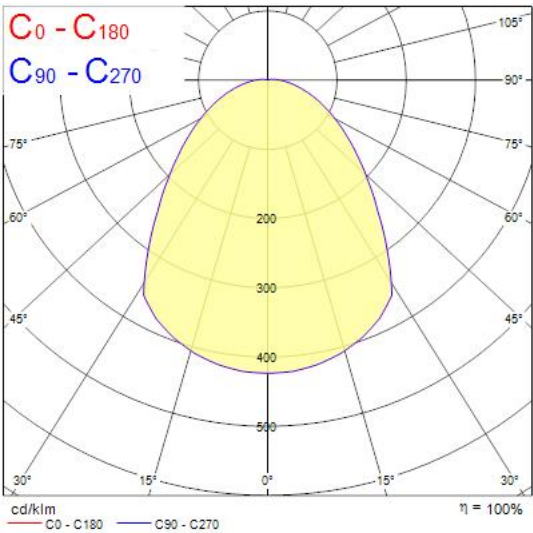

Technical drawings

