

START Downlight 175 IP54 1600Lm 840 DALI
0030335



Features

• Ceiling recessed LED downlight IP54 (from the front), with only 55mm product depth and 175mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800670). Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 15W, 4000K, Driver Current: 400mA, CRI80, 74° beam angle, IP54 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 175 IP54 1600Lm 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278161
Fixture luminous flux (lm)	1600
Luminous flux (lm)	1600
Luminaire efficacy (lm/W)	107
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15

START Downlight 175 IP54 1600Lm 840 DALI 0030335

Electrical protection	Class II
Control gear type	LED driver constant current
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303352
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	1600

Photometry

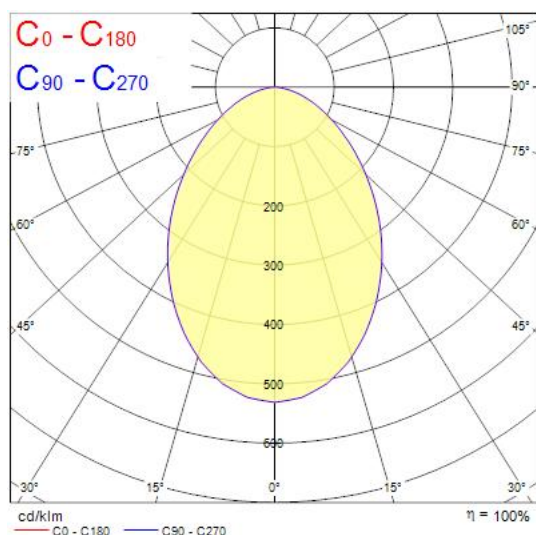

Technical drawings

