

START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK  
0049252



Features

- LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, 17W max. power consumption, 88lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 60,000 hours (L70), black housing, vandal resistant. DALI and DALI 2 dimming compatibility. Integrated emergency, 3 hours, supplied with anti-theft screws


Product Overview

|                                   |                                                 |
|-----------------------------------|-------------------------------------------------|
| Product name                      | START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK |
| Technology                        | LED                                             |
| Cap/Base                          | N/A                                             |
| Housing                           | PC Polycarbonate                                |
| Mount                             | Ceiling surface mounting                        |
| Environment                       | Indoor, Outdoor                                 |
| General application               | Hospitality                                     |
| ETIM Class                        | EC002892                                        |
| Fixture luminous flux (lm)        | 1500                                            |
| Luminaire efficacy (lm/W)         | 89                                              |
| LOR (%)                           | 100                                             |
| Correlated colour temperature (k) | 4000                                            |
| Light colour                      | Neutral White                                   |
| CRI (Ra)                          | 80                                              |
| Colour Variation Initial (SDCM)   | 6                                               |
| Beam Angle (°)                    | 120                                             |
| Glare control                     | < 25                                            |
| Photobiological Risk Group        | RG0                                             |
| Total power consumption (W)       | 17                                              |
| Electrical protection             | Class II                                        |
| Control gear type                 | LED driver constant current                     |

START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK  
0049252

|                             |                        |
|-----------------------------|------------------------|
| Control gear mounting       | Integrated             |
| Minimum dimming level (%)   | 1                      |
| LED Flickering Rate         | Ultra low (5% or less) |
| Housing colour              | RAL9011                |
| IP rating                   | IP66                   |
| IK rating                   | IK10                   |
| Product EAN number          | 5410288492520          |
| Warranty                    | 5 years                |
| Dimming method              | DALI                   |
| Colour Code                 | 840                    |
| Useful luminous flux (#use) | 1500                   |

Photometry

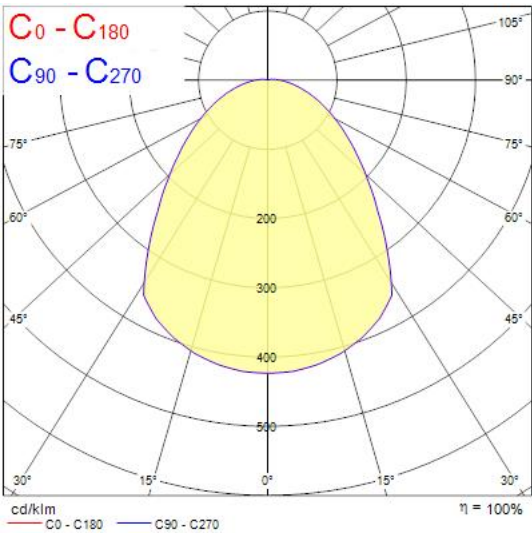

Technical drawings

