

KUBIXX 4000K 32KLM WIDE DALI
0062125



Features

- Logistics and Industry high bay luminaire with wide optics to provide homogenous light distribution for open space areas. 32200lumens, 188W, 171lm/W, 4000K, CRI80, wide beam optic, DALI-2 dimmable, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK06.


Product Overview

Product name	KUBIXX 4000K 32KLM WIDE DALI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
Fixture luminous flux (lm)	32200
Luminaire efficacy (lm/W)	171
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	188
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Grey


KUBIXX 4000K 32KLM WIDE DALI
0062125

IP rating	IP65
IK rating	IK06
Product EAN number	5410288621258
Warranty	5 years
Dimming method	DALI-2

Photometry

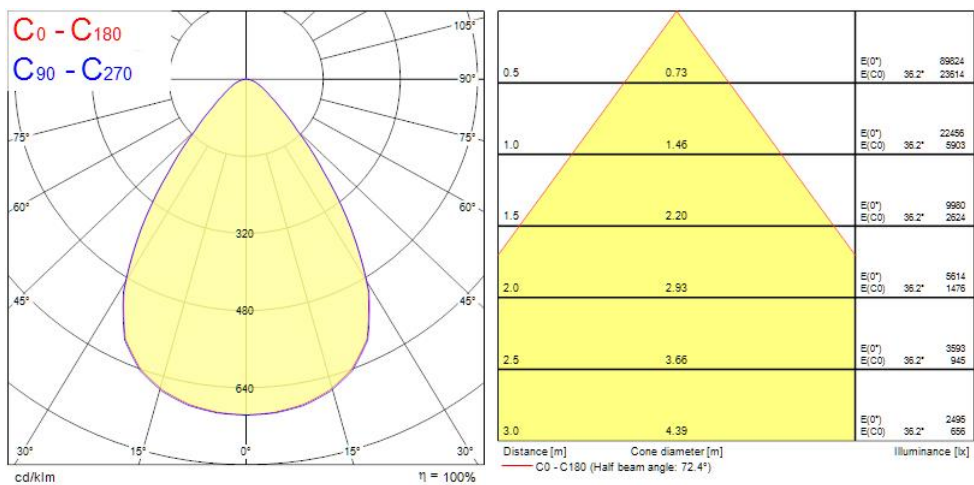

Technical drawings

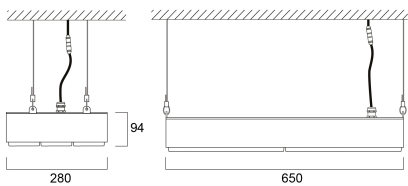

Data table

GENERAL DATA

Product name	KUBIXX 4000K 32KLM WIDE DALI
--------------	------------------------------

KUBIXX 4000K 32KLM WIDE DALI 0062125

Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+50°C
ETIM Class	EC001716
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	32200
Luminaire efficacy (lm/W)	171
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 26
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	188
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	920
Inrush Current (A)	80
Inrush Duration (µs)	225
Energy Efficiency Class (A->G) of contained light source	B

KUBIXX 4000K 32KLM WIDE DALI 0062125

Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	6
Max. products per 13A C Breaker	10
Max. products per 16A C Breaker	13
Max. products per 20A C Breaker	16
Max. products per 10A B Breaker	4
Max. products per 13A B Breaker	6
Max. products per 16A B Breaker	8
Max. products per 20A B Breaker	10

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	95000
Lifespan L90 B10	45000

PHYSICAL DATA

Housing colour	Grey
IP rating	IP65
IK rating	IK06
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	650
Nominal Product Width (mm)	280
Nominal Product Height (mm)	94
Weight (kg)	6.7

PACKAGING

Product EAN number	5410288621258
Packaging single length / height (cm)	48.0
Packaging single width (cm)	32.0
Packaging single depth (cm)	26.0
DUN14 (inner)	05410288621258
Units per outer package	1
Packaging outer length / height (cm)	48.0



KUBIXX 4000K 32KLM WIDE DALI
0062125

Packaging outer width (cm)	32.0
Packaging outer depth (cm)	26.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-40-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No