

START SPOT ALU 870LM 3CCT DIM IP44 WHT
0005184



Features

- Integrated LED recessed spotlight, vertical tilt 30°, white aluminium bezel finish, dimmable trailing/leading edge, 3-CCT changeable 2700-3000-4000K, 50° degree beam angle, polycarbonate and aluminium body, low profile 62mm recessed depth, IP44 from the front, IK07, loop-in/loop-out terminals for fast wiring, 68mm cutout, clear lens. Additional black or gold reflectors can be ordered as accessory.


Product Overview

Product name	START SPOT ALU 870LM 3CCT DIM IP44 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4279307
Fixture luminous flux (lm)	870
Luminaire efficacy (lm/W)	100
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	8.7
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	RAL9016
IP rating	IP44/20

START SPOT ALU 870LM 3CCT DIM IP44 WHT 0005184

IK rating	IK07
Product EAN number	5410288051840
Warranty	5 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	870

Photometry

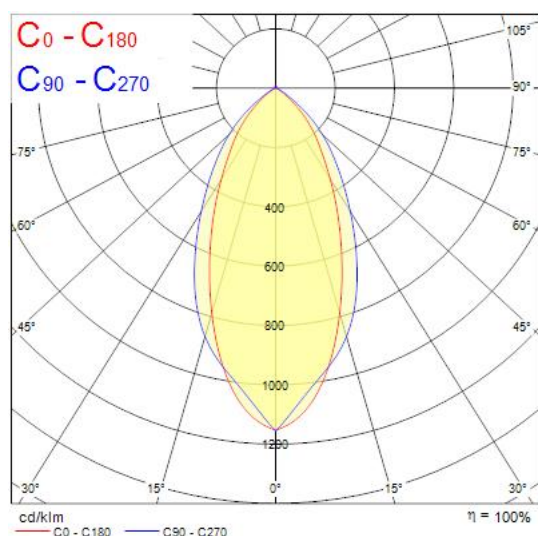

Technical drawings

