



Features

- Insaвер is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of KGP CC44W700-1050 DALI), 41W; 4800lm; 117lm/W; 3000K; UGR <22 with shallow product depth 65mm. Meets TP(a) requirements.


Product Overview

Product name	INSAVER IP54 225 4800LM 830 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278536
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	117
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class II

INSAVER IP54 225 4800LM 830 DALI
0030540


Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305400
Warranty	5 years
Dimming method	DALI-2, Switch-dim (mains-rated)
Colour Code	830

Photometry

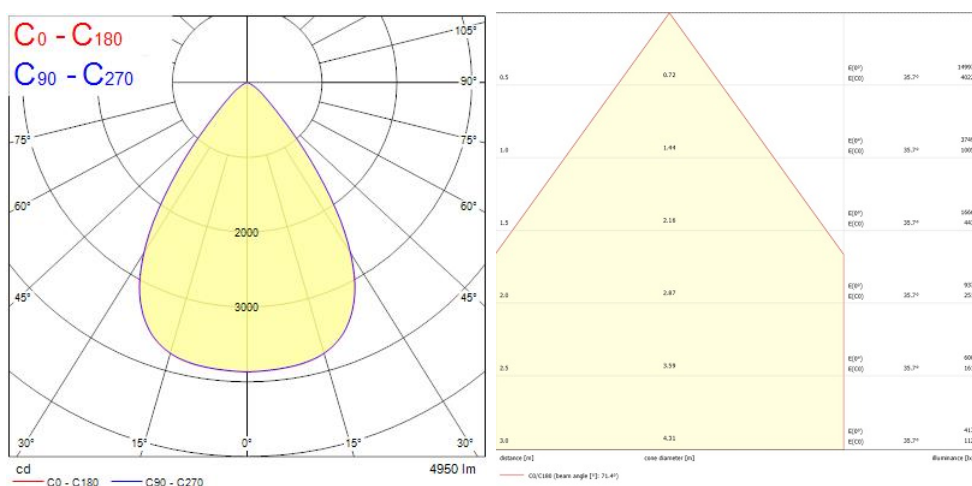

INSAVER IP54 225 4800LM 830 DALI
0030540

Technical drawings

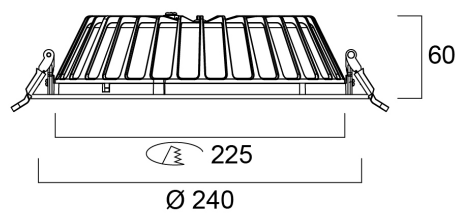

Data table

GENERAL DATA

Product name	INSAVER IP54 225 4800LM 830 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4278536
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	117

INSAVER IP54 225 4800LM 830 DALI 0030540

Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	41
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Drive current (mA)	1050
Inrush Current (A)	20
Inrush Duration (µs)	29
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	25
Max. products per 13A C Breaker	30
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	50

INSAVER IP54 225 4800LM 830 DALI 0030540

Max. products per 10A B Breaker	16
Max. products per 13A B Breaker	18
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	31
Connectable conductor cross section - Min (mm ²)	0.5
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L70 B20	90000
Lifespan L70 B10	90000
Lifespan L80 B50	100000
Lifespan L80 B20	88000
Lifespan L80 B10	80000
Lifespan L90 B50	50000
Lifespan L90 B20	43000
Lifespan L90 B10	39000

PHYSICAL DATA

Housing colour	RAL9010
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	240
Built-in diameter (mm)	225
Weight (kg)	0.86
Recessed Depth (mm)	150

PACKAGING



INSAVER IP54 225 4800LM 830 DALI
0030540

Product EAN number	5410288305400
Packaging single length / height (cm)	27.1
Packaging single width (cm)	27.0
Packaging single depth (cm)	10.2
DUN14 (inner)	15410288305407
Units per outer package	12
Packaging outer length / height (cm)	56.3
Packaging outer width (cm)	56.5
Packaging outer depth (cm)	33.1

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No