



Features

• MC2-KIT D/I 2.4M 4K DALIEM BLK OPAL LED luminaire, black RAL9005 finishing, direct/indirect distribution (65/35), suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 59W, total fixture output: 8100lm, emergency output: 147lm, luminaire efficacy: 137lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, integral emergency: 3 hour maintained, electrical protection: CLASS I, IP20, suitable for internal environment only.


Product Overview

Cap/Base	N/A
Control gear type	Electronic ballast

Concord

MC2 D/I KIT 2.4M 4K DALIEM BLK OPAL
2071568

Photometry

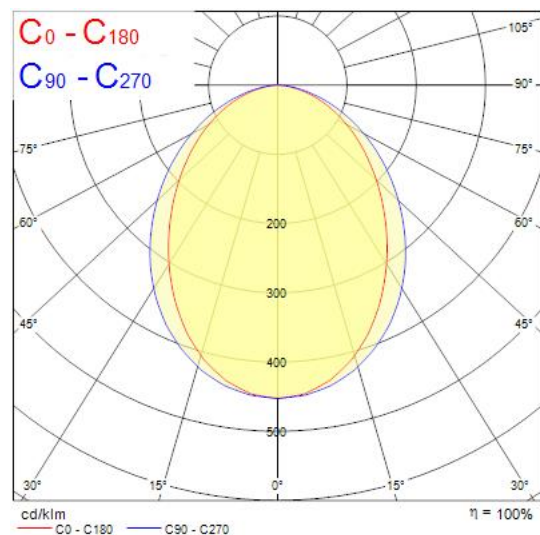

Technical drawings

