



Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, integrated anti-condensation valve, IP66, IK08, Class I, 3000K, CRI80, DALI dimmable, 29000lm, 196W, 148lm/W, Asymmetrical Wide beam, 100.000hrs L80B50 lifespan, 532 x 407 x 97mm (LxWxD) dimensions, 7.8kg weight, RAL9017 Traffic Black color, Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3.


Product Overview

Product name	Kalani IP66 28KLM 830 ASYM DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579651
Fixture luminous flux (lm)	29000
Luminaire efficacy (lm/W)	148
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	65x120
Photobiological Risk Group	RG1
Total power consumption (W)	196
Electrical protection	Class I
Control gear type	LED driver constant current

Kalani IP66 28KLM 830 ASYM DALI
0056813

Dimmable	Yes
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9017
IP rating	IP66
IK rating	IK08
Product EAN number	5410288568133
Warranty	5 years
Dimming method	DALI-2

Photometry

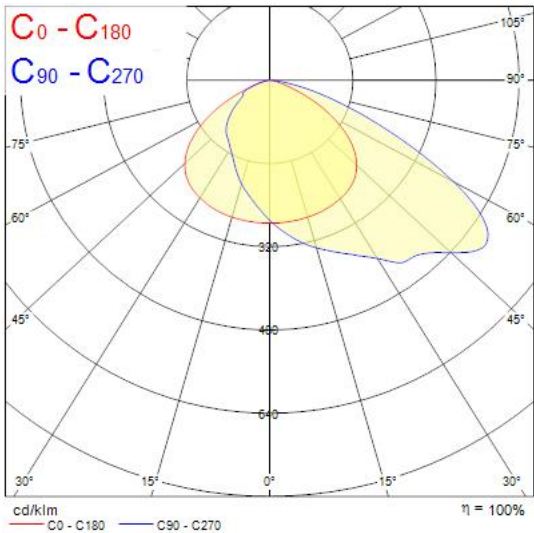

Technical drawings

