

START Downlight 205 IP54 2150lm 840
0030329



Features

• Ceiling recessed LED downlight IP54 (from the front), perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 20W, 4000K, Driver Current: 600mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP54 from the front, IK07, (HxW) 60x205mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 205 IP54 2150lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278153
Fixture luminous flux (lm)	2150
Luminous flux (lm)	2150
Luminaire efficacy (lm/W)	102
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74

START Downlight 205 IP54 2150lm 840 0030329

Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303291
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	2025

Photometry

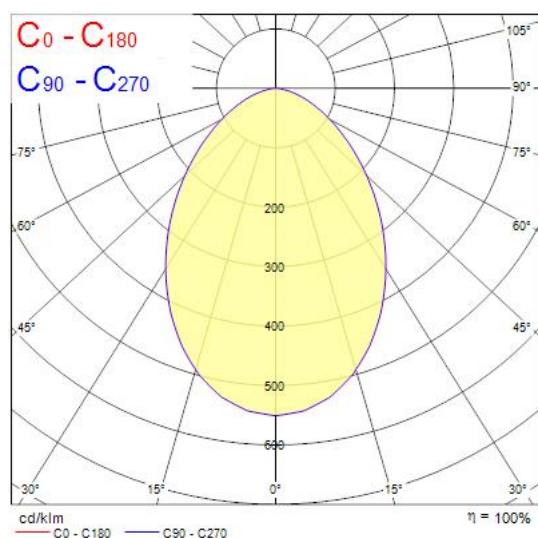

Technical drawings

