



Features

• RTS LED linear luminaire for industrial and commercial applications. 1500 mm lenght with narrow optics provide homogenous light distribution for aisles and focus areas. Suitable for Central Battery operating. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 70 W power consumption, 11200 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.


Product Overview

Product name	RTS 1.5M 70W 12C NR DD CB
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC001957
Fixture luminous flux (lm)	11200
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	25
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	1693
Total power consumption (W)	70
Electrical protection	Class I


RTS 1.5M 70W 12C NR DD CB
0042602

Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288426020
Warranty	5 years
Dimming method	DALI

Photometry

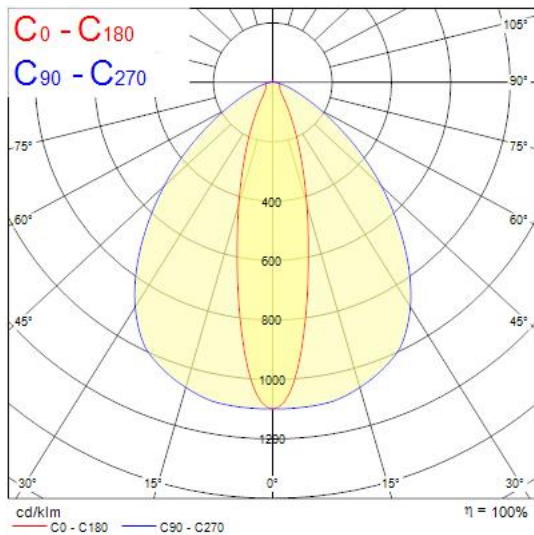

Technical drawings

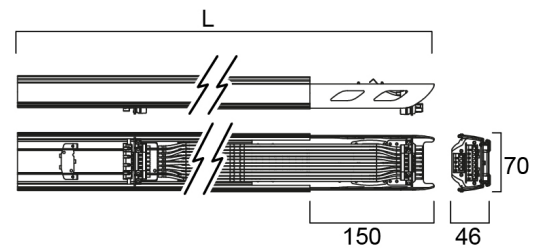

L	600	900	1202	1500	2403	3000	3605	4500
---	-----	-----	------	------	------	------	------	------