

OPTIX RECESSED 4 CELLS 4000K ALU DALI 2021693



Features

• OPTIX RECESSED 4 CELLS 4000K ALU DALI is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 310x100 mm. Aluminised plastic extra low glare optics. White RAL9016 fixture body. DALI dimmable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 1010lm. Power consumption 8.5W. Luminaire efficacy 119lm/W. 42,000hrs L90B10 lifespan. UGR<18, Luminance at 65°<3000 Cd/m2, IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.


Product Overview

Product name	OPTIX RECESSED 4 CELLS 4000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	1010
Luminaire efficacy (lm/W)	119
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	8.5
Electrical protection	Class I
Control gear type	LED driver constant current

OPTIX RECESSED 4 CELLS 4000K ALU DALI 2021693

Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216932
Warranty	5 years
Dimming method	DALI

Photometry

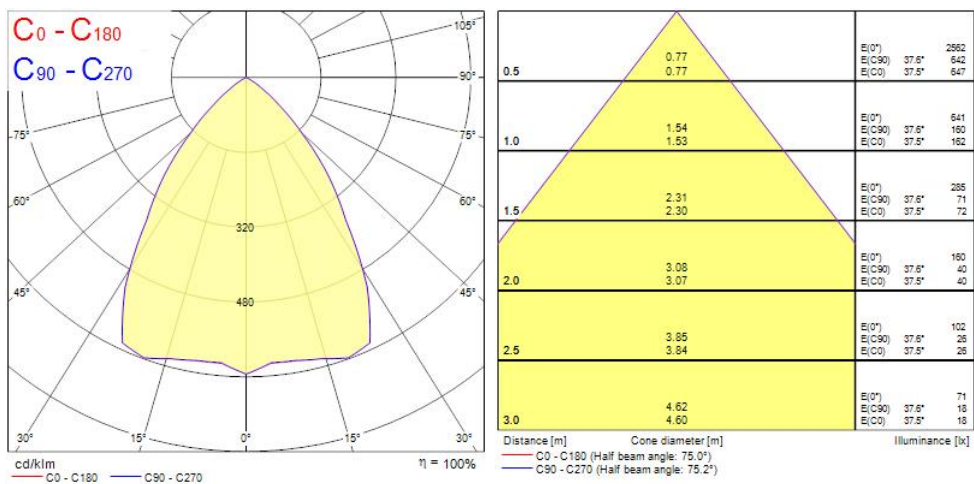


Concord

OPTIX RECESSED 4 CELLS 4000K ALU DALI

2021693

Technical drawings

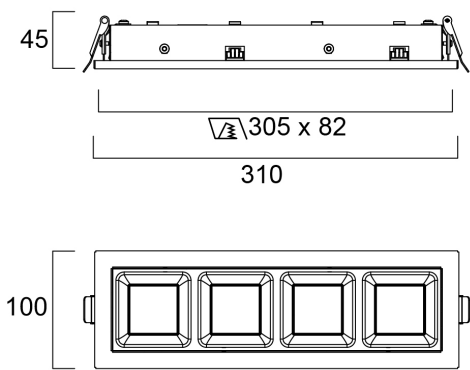

Data table

GENERAL DATA

Product name	OPTIX RECESSED 4 CELLS 4000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1010
Luminaire efficacy (lm/W)	119

OPTIX RECESSED 4 CELLS 4000K ALU DALI 2021693

Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	8.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.89
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	6.5
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	150
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	100
Max. products per 13A C Breaker	130
Max. products per 16A C Breaker	160
Max. products per 20A C Breaker	200
Max. products per 10A B Breaker	100
Max. products per 13A B Breaker	130
Max. products per 16A B Breaker	160
Max. products per 20A B Breaker	200
Connectable conductor cross section - Min (mm²)	0.5

OPTIX RECESSED 4 CELLS 4000K ALU DALI 2021693

Connectable conductor cross section - Max (mm²)	1.5
---	-----

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	96500
Lifespan L90 B10	42000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	310
Nominal Product Width (mm)	100
Nominal Product Height (mm)	45
Weight (kg)	0.69

PACKAGING

Product EAN number	5025768216932
Packaging single length / height (cm)	36.5
Packaging single width (cm)	18.2
Packaging single depth (cm)	6.0
DUN14 (inner)	05025768216932
Units per outer package	1
Packaging outer length / height (cm)	36.5
Packaging outer width (cm)	18.2
Packaging outer depth (cm)	6.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25

Concord

OPTIX RECESSED 4 CELLS 4000K ALU DALI 2021693

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No