

Features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyers. Body Size diameter 300mm. Besa mounting box compatible, hole distance 51 & 78mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. With the help of DIP Switch multiple lumen outputs can be set up in 4 steps (4000K: 5W 500lm, 8.3W 1000lm, 12.5W 1500lm, 16.5W 2000lm). Efficacy up to 120lm/W. Non-dimmable. IK03, IP54. Low maintenance with lifespan 120,000 hours L70:B50.


Product Overview

Product name	START Surface IP54 500-2000lm 830/840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Museums & Galleries, Hospitality
ETIM Class	EC002892
E-number FI	4279503
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	120
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	16.5
Electrical protection	Class II
Control gear type	LED driver constant current

START Surface IP54 500-2000lm 830/840 0043405

Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9003
IP rating	IP54
IK rating	IK03
Product EAN number	5410288434056
Warranty	5 years
Dimming method	N/A

Photometry

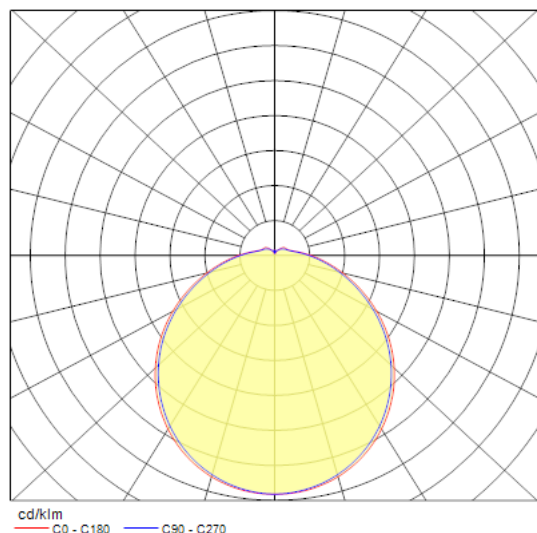

Technical drawings

