




ToLEDo Stick V4 1100LM 840 E27 SL
0029565



Features

- A bright, all-around lighting solution for living rooms, wall lights, ceiling lights, compact and decorative luminaires Quick and easy replacement of compact fluorescent, halogen or incandescent lamp 15,000H average rated life 85% energy savings compared to incandescent Last 50% longer and consume 45% less energy compared to comact flourescent integrated lamps Omni-directional light distribution Non-dimmable

Product Overview

Product name	ToLEDo Stick V4 1100LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	10.0
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740971
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	10.0
Power consumption (W)	10
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295657

ToLEDo Stick V4 1100LM 840 E27 SL
0029565

Warranty	3 years
Useful luminous flux (#use)	1100

Technical drawings



Data table

GENERAL DATA

Product name	ToLEDo Stick V4 1100LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	10.0
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

ToLEDo Stick V4 1100LM 840 E27 SL 0029565

E-number FI	4740971
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	1100
Luminous flux (Rated) (lm)	1100
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	10
Wattage (W)	10.0
Equivalent watt (W)	75
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	1.4
Inrush Duration (µs)	150
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	120
Max. products per 20A C Breaker	120
Max. products per 10A B Breaker	120
Max. products per 13A B Breaker	120
Max. products per 16A B Breaker	120



ToLEDo Stick V4 1100LM 840 E27 SL
0029565

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

PHYSICAL DATA

Nominal Product Height (mm)	137
Nominal Product Diameter (mm)	45
Weight (kg)	0.072

PACKAGING

Product EAN number	5410288295657
Packaging single length / height (cm)	5.3
Packaging single width (cm)	5.3
Packaging single depth (cm)	14.4
DUN14 (inner)	15410288295654
Units per outer package	6
Packaging outer length / height (cm)	16.4
Packaging outer width (cm)	11.1
Packaging outer depth (cm)	15.8


SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label



0029565

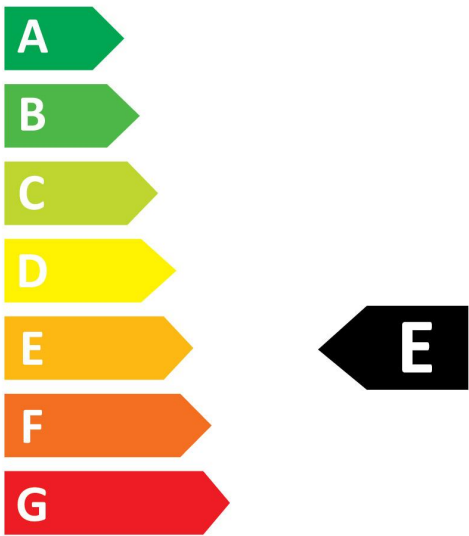


10 kWh/1000h



2019/2015



0029565

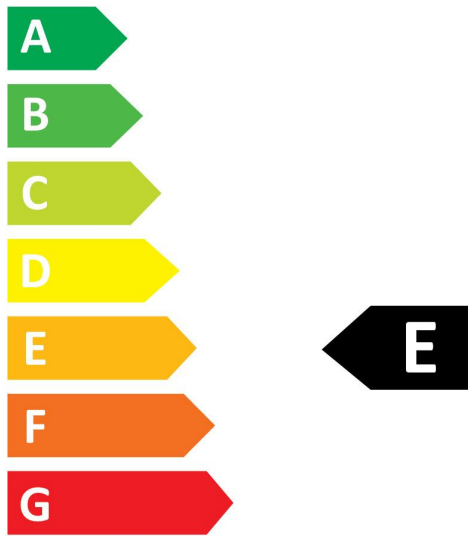

10 kWh/1000h



2019/2015