


# Concord

## OFFICELYTE 600 4000K C90 HO

2069534

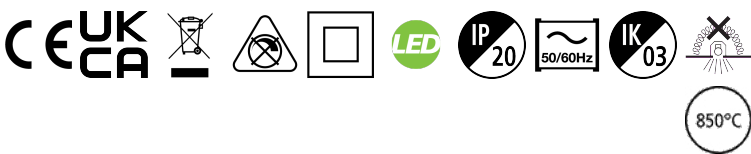

### Features

• Concord OFFICELYTE 600 4000K C90 HO is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. 595x595x92mm dimensions. 4200lm luminous flux, 33.5W total power consumption, 125lm/W efficacy level, CRI90 4000K (Neutral white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class II electrical protection. Photobiological Risk Group 1. Lifespan 93k hours at L80B50. Glow Wire test 850°C. Non-dimmable driver.

### Product Overview


|                                   |                             |
|-----------------------------------|-----------------------------|
| Product name                      | OFFICELYTE 600 4000K C90 HO |
| Technology                        | LED (3 SDCM)                |
| Cap/Base                          | N/A                         |
| Housing                           | Steel                       |
| Mount                             | Ceiling recessed mounting   |
| General application               | Office, Education           |
| ETIM Class                        | EC002892                    |
| Fixture luminous flux (lm)        | 4, 200                      |
| Luminaire efficacy (lm/W)         | 125                         |
| Correlated colour temperature (k) | 4000                        |
| Light colour                      | Neutral White               |
| CRI (Ra)                          | 90                          |
| Colour Variation Initial (SDCM)   | 3                           |

# Concord

## OFFICELYTE 600 4000K C90 HO 2069534

|                             |                             |
|-----------------------------|-----------------------------|
| Beam Angle (°)              | 87                          |
| Glare control               | < 19                        |
| Photobiological Risk Group  | RG1                         |
| Total power consumption (W) | 33.5                        |
| Electrical protection       | Class II                    |
| Control gear type           | LED driver constant current |
| Dimmable                    | No                          |
| Housing colour              | RAL9016                     |
| IP rating                   | IP20                        |
| IK rating                   | IK03                        |
| Product EAN number          | 5025768695348               |
| Warranty                    | 5 years                     |
| Dimming method              | N/A                         |

### Photometry

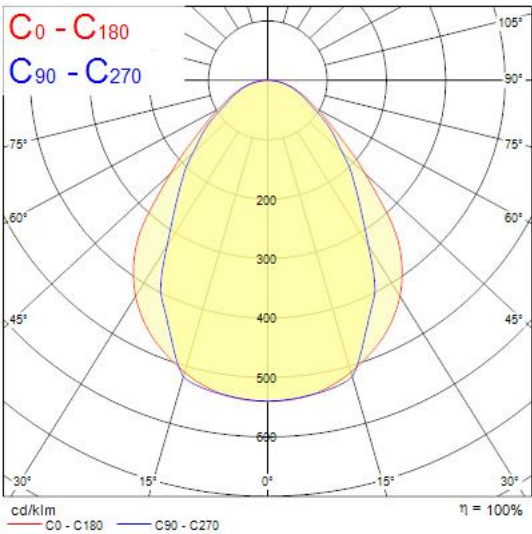

### Technical drawings

