



Features

- Compact, energy efficient and exceptional value for money productSame shape and size as halogen MR16 lampCompact Cluster SMD technology enabling high efficiency with halogen lookReduced visible heat sink from the frontAvailable in 36 degreeHigh lumen efficacy12V AC/DC25,000 hours average rated life3 years warranty


Product Overview

Product name	RefLED Superia Retro MR16 V2 380LM 865 36° SL
Technology	LED
Watt (Rated) (W)	4.3
Fixture rating	Open
General application	Education, Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741109
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	4.3
Power consumption (W)	4.3
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288292298

RefLED Superia Retro MR16 V2 380LM 865 36° SL
0029229

Warranty	3 years
Useful luminous flux (#use)	380

Technical drawings

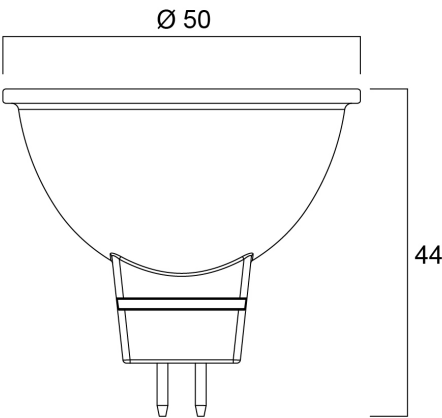

Data table

GENERAL DATA

Product name	RefLED Superia Retro MR16 V2 380LM 865 36° SL
Technology	LED
Watt (Rated) (W)	4.3
Fixture rating	Open
General application	Education, Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741109
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	380
-----------------------------	-----



RefLED Superia Retro MR16 V2 380LM 865 36° SL
0029229

Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	600
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	4.3
Wattage (W)	4.3
Equivalent watt (W)	35
Primary Supply/Product voltage - min (V)	12
Primary Supply/Product voltage - max (V)	12
Control gear required	Yes
No. Of switching cycles before premature failures	>50000
Dimmable	No
Lamp Energy Label (class)	F

LIFETIME DATA

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

PHYSICAL DATA

Nominal Product Length (mm)	44
Nominal Product Diameter (mm)	50
Weight (kg)	0.03

PACKAGING

RefLED Superia Retro MR16 V2 380LM 865 36° SL 0029229

Product EAN number	5410288292298
Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	15410288292295
Units per inner package	6
Packaging inner length / height (cm)	19.4
Packaging inner width (cm)	11.4
Packaging inner depth (cm)	9.4
DUN14 (outer)	25410288292292
Units per outer package	36
Packaging outer length / height (cm)	36.2
Packaging outer width (cm)	21.7
Packaging outer depth (cm)	21.9


SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label



0029229

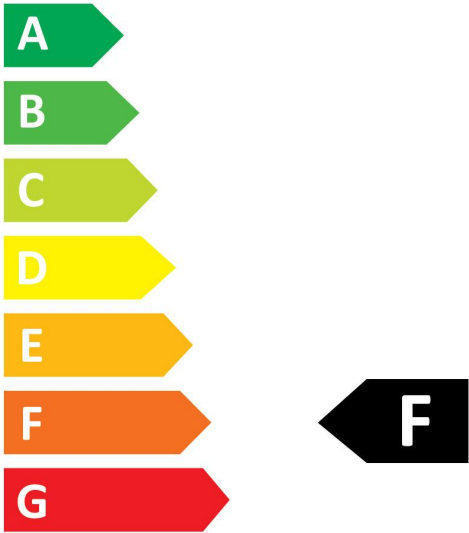


5
kWh/1000h



2019/2015



0029229

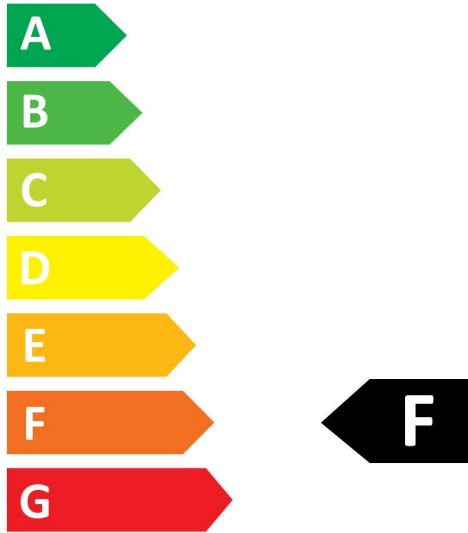

5
kWh/1000h



2019/2015