


**Insaver Slim UGR19 175 IP44 1600lm 840
0030303**

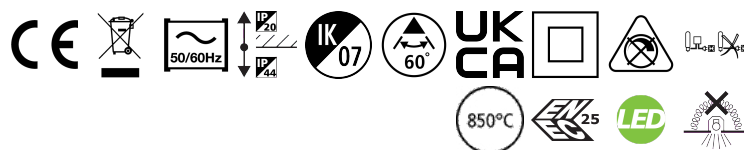

Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 13W; 1600lm; 123lm/W; 4000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.


Product Overview

Product name	Insaver Slim UGR19 175 IP44 1600lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4276917
Fixture luminous flux (lm)	1600
Luminaire efficacy (lm/W)	123
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	13
Electrical protection	Class II

Insaver Slim UGR19 175 IP44 1600lm 840
0030303

Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303031
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	1600

Photometry

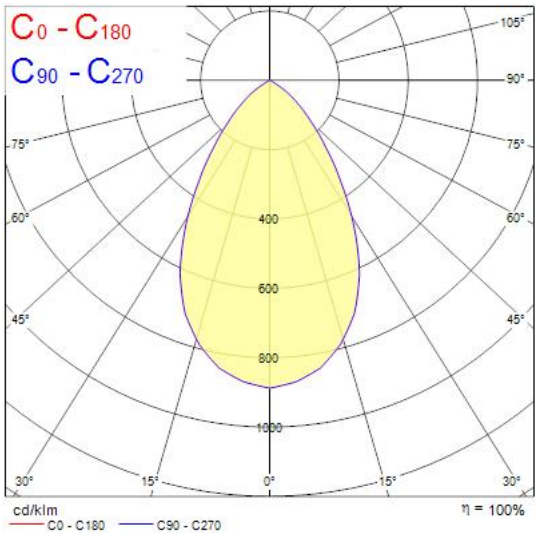

Technical drawings

