

## Features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability, steel housing, 3200lm, 23W, 139lm/W, 4000K, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 90000 hrs L80B20 lifespan, non-dimmable driver, IK08, IP20, 1220 x 70 x 76.5mm (LxWxD) dimensions, 1.37kg weight.


## Product Overview

Product name	Wayline 1200 3200lm 840
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4278289
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	139
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	115
Photobiological Risk Group	RG1
Total power consumption (W)	23
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK08
Product EAN number	5410288489124

Wayline 1200 3200lm 840  
0048912

Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	3200

## Photometry

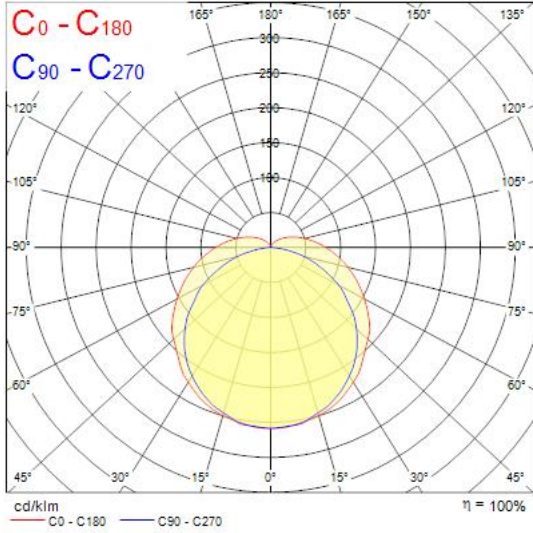

## Technical drawings

