

### Features

• OPTICLIP R 600 940 2L WHT MP is a high efficacy low glare ceiling recessed mounted luminaire with replaceable light engines for office and education applications. White colour plastic optic (reflector + lens), direct light distribution. Luminaire dimensions: 595x595x17mm. White body colour (RAL9016), IP40 (from the front), IK07, 8-steps dip switch non-dimmable driver, 15.5-33W power consumption, (output options: 4250lm/33W, 4050lm/31W, 3700lm/28W, 3400lm/25.5W, 3100lm/23W, 2750lm/20.5W, 2450lm/18.5W and 2050lm/15.5W), 4000K (neutral white) CCT, 4250lm luminous flux at 900mA drive current level, 129lm/W system efficacy, CRI>90, SDCM≤3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<16, luminance at 65° < 1000 cd/m<sup>2</sup>. Lifespan: 100,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


### Product Overview

<b>Product name</b>	OPTICLIP R 600 940 2L WHT MP
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4170623
<b>Fixture luminous flux (lm)</b>	4250
<b>Luminaire efficacy (lm/W)</b>	129
<b>Correlated colour temperature (k)</b>	4000

## OPTICLIP R 600 940 2L WHT MP 0034010

Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288340104
Warranty	5 years
Dimming method	N/A

### Photometry

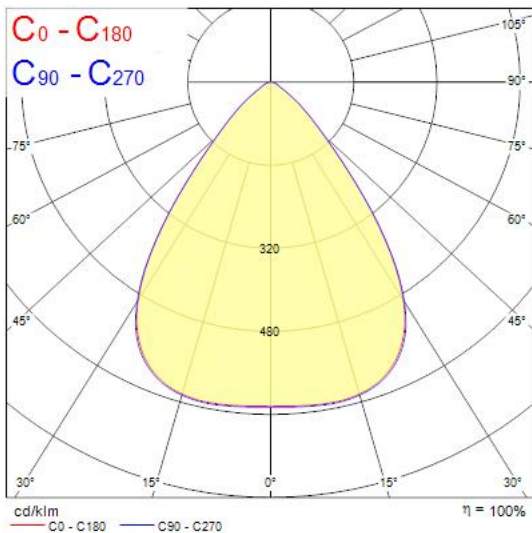

### Technical drawings

