

AREUM SUSPENDED 1200 D/I 4000K SSC ALU
0042974



Features

• AREUM SUSPENDED 1200 D/I 4000K SSC ALU is a highly efficient suspended LED luminaire with 70% direct and 30% indirect light distribution. Ultra thin (17mm) aluminium body with rounded edges. Length 1200mm, width 300mm. White aluminium RAL9006 powder coated luminaire body, powder coated steel surface gearbox and Y-shape power feeded suspension cables. SylSmart Standalone capable. Luminous flux: 5150lm, Power consumption: 41W. Luminaire efficacy: 126lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 57,000h. UGR<19, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.


Product Overview

Product name	AREUM SUSPENDED 1200 D/I 4000K SSC ALU
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Suspended
General application	Office
ETIM Class	EC001743
Fixture luminous flux (lm)	5150
Luminaire efficacy (lm/W)	129
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	84
Glare control	< 19

AREUM SUSPENDED 1200 D/I 4000K SSC ALU
0042974

Photobiological Risk Group	RG0
Total power consumption (W)	41
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9006
IP rating	IP20
IK rating	IK03
Product EAN number	5410288429748
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

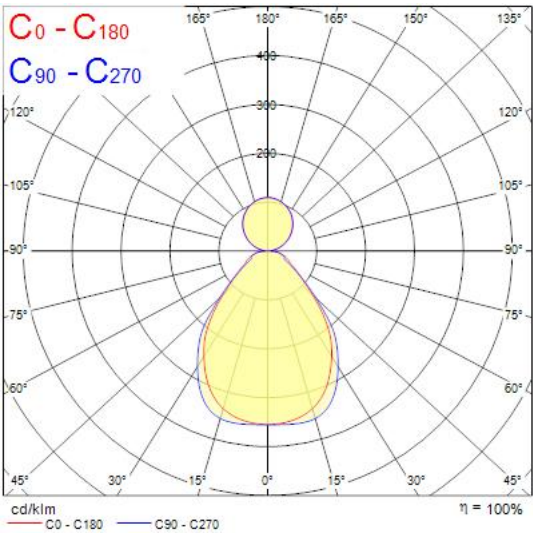

Technical drawings

