


START WATERPROOF 1200 HOUSING 2X 0047194

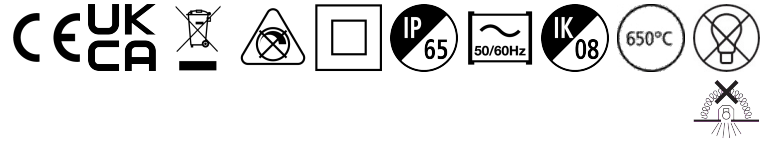

Features

- Luminaire, polycarbonate housing
- Twin version, 1200mm
- Protection type IP65
- Luminous flux and light colour vary depending on LED tubes used
- To be used with T8 LED tubes
- Easy to install with stainless steel fixing brackets included for ceiling mounting
- Ideal for any industrial facilities, garages, car parks, workshops.

Product Overview

Product name	START WATERPROOF 1200 HOUSING 2X
Technology	LED
Cap/Base	2G13
Housing	PC Polycarbonate
Mount	Wall surface mounted
Light source included	Fixture without Lightsource
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357156
Fixture luminous flux (lm)	1
Luminaire efficacy (lm/W)	1
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Total power consumption (W)	0.1
Electrical protection	Class II
Control gear type	Not required
Dimmable	No
Housing colour	Grey
IP rating	IP65

START WATERPROOF 1200 HOUSING 2X 0047194

IK rating	IK08
Product EAN number	5410288471945
Warranty	5 years
Dimming method	N/A

Technical drawings

