

AREUM SUSPENDED 1500 D/I 4000K ALU
0042954



Features


• AREUM SUSPENDED 1500 D/I 4000K ALU is a highly efficient suspended LED luminaire with 70% direct and 30% indirect light distribution. Ultra thin (17mm) aluminium body with rounded edges. Length 1500mm, width 300mm. White aluminium RAL9006 powder coated luminaire body, powder coated steel surface gearbox and Y-shape power feeded suspension cables. Low flicker (<5%) Constant Current driver. Luminous flux: 7000lm, Power consumption: 56W. Luminaire efficacy: 125lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 57,000h. UGR<19, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.

Product Overview

Cap/Base	N/A
Control gear type	LED driver constant current

AREUM SUSPENDED 1500 D/I 4000K ALU
0042954

Photometry

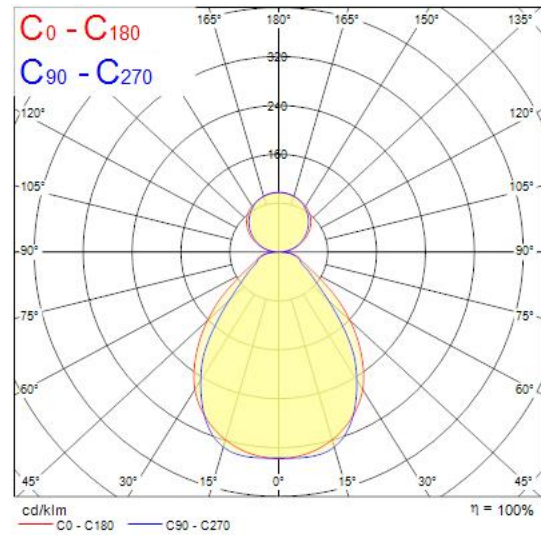

Technical drawings

