

START Downlight 150 IP54 1250Lm 840 DALI
0030333



Features

• Ceiling recessed LED downlight IP54 (from the front), with only 45mm product depth and 150mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800670) . Ideal replacement for 1x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 12W, 4000K, Driver Current: 300mA, CRI80, 74° beam angle, IP54 from the front, IK07, (HxW) 45x165mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 150 IP54 1250Lm 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278158
Fixture luminous flux (lm)	1250
Luminous flux (lm)	1250
Luminaire efficacy (lm/W)	104
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II

START Downlight 150 IP54 1250Lm 840 DALI
0030333

Control gear type	LED driver constant current
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303338
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	1250

Photometry

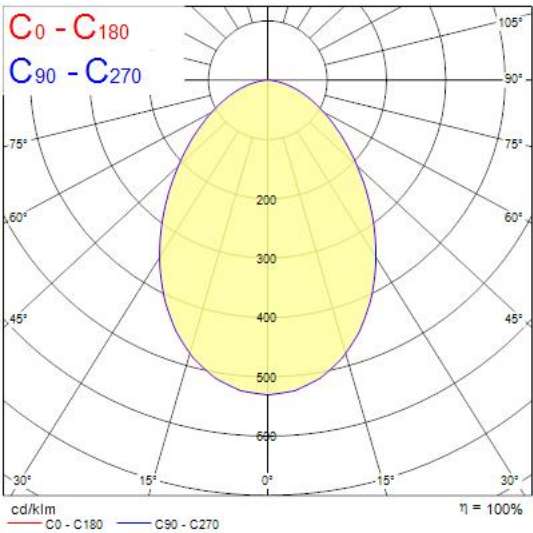

Technical drawings

