




Features

• AREUM WALL 600 D/I 4000K ALU is a highly efficient wall mounted LED luminaire with 40% direct and 60% indirect light distribution. 28mm high aluminium body with rounded edges. Length 600mm, width 200mm. White aluminium RAL9006 powder coated luminaire body and powder coated steel wall mounted gearbox. Low flicker (<5%) Constant Current driver with DIP switch option. Luminous flux: 5850lm, Power consumption: 45W. Luminaire efficacy: 130lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 100,000h. UGR<16, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.

Product Overview

|                   |                             |
|-------------------|-----------------------------|
| Cap/Base          | N/A                         |
| Control gear type | LED driver constant current |

## Photometry

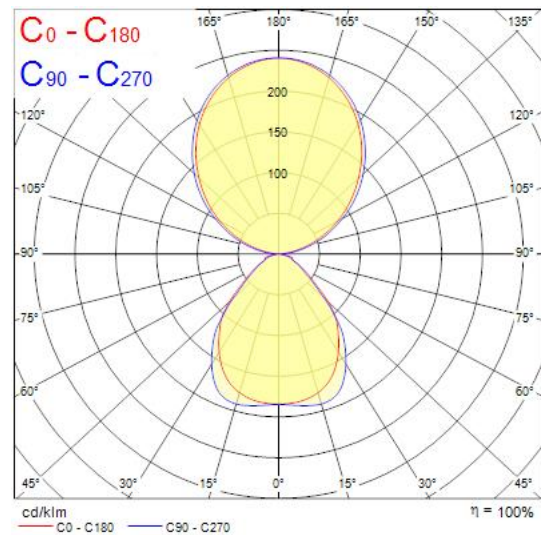

## Technical drawings

