

START Downlight Eco 95 640lm 830
0053910



Features

- START Downlight Eco is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 8W; 640Lm; 80Lm/W; 3000K.


Product Overview

Product name	START Downlight Eco 95 640lm 830
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	640
Luminaire efficacy (lm/W)	80
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL9003

START Downlight Eco 95 640lm 830 0053910

IP rating	IP20
IK rating	IK02
Product EAN number	5410288539102
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	640

Photometry

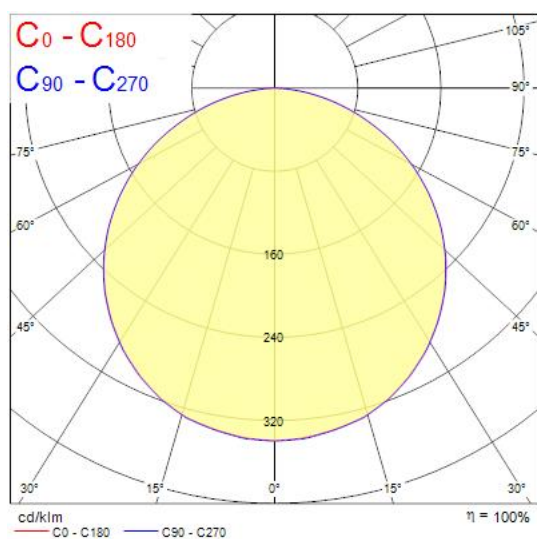

Technical drawings

